

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

614963

First Named Inventor or Application Identifier:

Kazuhisa MURATA

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

**ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231**

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract [Total Pages: 57]
3. ☒ Drawing(s) (35 USC 113) [Total Sheets: 13]
4. ☒ Oath or Declaration [Total Pages: 3]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application, status still proper and desired.
15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: /
18. CORRESPONDENCE ADDRESS
 STAAS & HALSEY
 Attn: H. J. Staas
 700 Eleventh Street, N.W., Suite 500
 Washington, DC 20001

 Telephone: (202) 434-1500
 Facsimile: (202) 434-1501

Patent Office

SPECIFICATION

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN THAT I, Kazuhisa Murata, a citizen of Japan residing at Kawasaki-shi, Kanagawa, Japan have invented certain new and useful improvements in

OPTICAL TRANSMISSION SYSTEM AND OPTICAL TRANSMISSION DEVICE

of which the following is a specification : -

TITLE OF THE INVENTION

OPTICAL TRANSMISSION SYSTEM AND OPTICAL
TRANSMISSION DEVICE

5 BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention generally relates to an optical transmission system that can be applicable to a long distance, high capacity transmission.

10 The present invention also relates to optical transmission devices, such as a transmitter and a receiver for the optical transmission system.

Such types of high capacity transmission systems using optical signals have been developed and designed so as to be adapted to multimedia applications. Many TDM (Time Division Multiplexing) transmission systems or WDM (Wavelength Division Multiplexing) transmission systems have been known. Typically, those systems have been intended to efficiently make use of a transmission line. In these high capacity transmission systems, it is particularly demanded that a reliable transmission can be achieved.

20 Therefore, the present invention relates to, in particular, the optical transmission system that has their transmission reliability been improved and the optical transmission device used in this system.

2. Description of the Related Art

A conventional wavelength-multiplexing transmission system includes an optical transmitter 201, an optical transmission line 203 and an optical receiver 202, as schematically shown in Fig.1, and the system is in conformity with SDH (Synchronous Digital Hierarchy) that is a set of international, digital transmission standards. The optical transmitter 201 has, for each of k channels CH_i ($i=1, \dots, k$), individually an SOH (Section Over Head) inserting unit 204 for

inserting an SOH, an electrical-optical converter (OS) 205 and a wavelength-multiplexer 206. The optical receiver 202 also has, for each of the k channels, individually a wavelength-demultiplexer 207, an
5 optical-electrical converter (OR) 208 and an SOH terminating unit 209.

The SOH inserting unit 204 at the optical transmitter 201 inserts the SOH into an electrical signal for one of the corresponding channels CH_1 . Each
10 electrical signal for the every channel is then provided to the optical-electrical converter 205 and converted to an optical signal with a wavelength λ_1 corresponding to the channel CH_1 . The optical signals having the wavelength of λ_1 are multiplexed by the
15 wavelength-multiplexer 206 and resulting wavelength-multiplexed signals are transmitted to the optical transmission line 203.

The wavelength demultiplexer 202 at the optical receiver 202 separates the multiplexed signals received from the optical transmitter 201 through the
20 optical transmission line 203 into the signals corresponding to the wavelengths λ_1 to λ_k , respectively. These optical signals having the wavelengths of λ_1 to λ_k , respectively, are converted
25 to corresponding electrical signals by the optical-electrical converter 208, and then the SOH of the electrical signals is terminated by the SOH terminating unit 209. The electrical signals having their SOH been terminated are transmitted to a further
30 stage (not shown in Fig.1) on each channel basis. Thus, the data comprising the electrical signals for each of the channels CH_1 to CH_k can be transmitted from the optical transmitter 201 to the optical receiver 202 over the single optical transmission line 203.

35 Several error correction techniques have been also proposed in order to improve a transmission quality by correcting transmission errors involved in

the transmitted data. For example, one of the known techniques, also called an "FEC (Forward Error Correction)" method, consists in generating and adding an error correction bit to the data representing one frame or the data of a predetermined length and performing the error correction at a receiver side.

Adding a parity bit to the transmitted data is also a common technique used for determining a presence/absence of the transmission error within the transmitted data. In this case, the SOH may be also provided with error monitoring bits, named B1 and B2.

The earlier described error correction techniques consist in, for every frame or every block of the transmission data, generating an error correction bit and adding it to each frame or block. Therefore, in contrast with a transmission system without correcting transmission errors, the conventional transmission system provided with the error correction technique has to increase a transmission rate, because a number of bits to be transmitted are increased. Alternatively, if the transmission rate is set to a predetermined value, the transmission system should reduce an amount of the transmission data so that the error correction bit can be transmitted together with the transmission data within the predetermined transmission rate.

Furthermore, in some of the conventional transmission system, erroneous bits included in the transmission data cannot be corrected when parity bits are contained in the data. One solution for improving a capability of correcting the erroneous bits in the data is to increase the number of the error correction bits added to the transmission data. However, this solution may be not practical, because a considerably high transmission rate is required for increasing the number of error correcting redundant bits to be added to the transmission data.

Another possible solution is to insert the error correction bits into reserved bits within the SOH. The reserved bits means that those bits are reserved for a variety of future applications. In this case, since a lot of redundant bits are to be inserted into some particular locations in the SOH, a problem may occur that a size of a circuit comprising transmission device, such as the transmitter 201 and the receiver 202, is enlarged. This solution has a further drawback in that the error correction bits, which have been already assigned to the reserved bits, cannot be made use of, if the reserved bits are decided to be used for one of the future applications.

15 SUMMARY OF THE INVENTION

Accordingly, an object of the present invention is to provide an optical transmission system for allowing a high capacity and high quality transmission and which can be easily and simply manufactured or implemented.

Another object of the present invention is to provide an optical transmitter and an optical receiver suitable for used in the optical transmission system according to the present invention.

25 The object of the present invention is achieved by an optical transmission system which is operable to form a set of k data by aligning each of phases from k channels in phase, generate and add a set of $(n-k)$ error correction bits to the set of k data so as to produce n data in total, convert the n data into different signals having different wavelengths λ_1 to λ_n , respectively, by an electrical-optical converter, multiplex these signals by an wavelength multiplexer, and send the multiplexed signals to an optical transmission line.

The inventive optical transmission system further operable to receive the multiplexed signals

through the optical transmission line, separate the received multiplexed signals into signals having different wavelengths λ_1 to λ_n , respectively, by a wavelength demultiplexer, converts the signals having the different wavelengths λ_1 to λ_n , respectively, to electrical signals by an optical-electrical converter, and correct errors within the k data by means of the (n-k) error correction bits contained in the n data.

In the optical transmission system according to the present invention, the k data concurrently transmitted are added to in parallel by the (n-k) error correction bits. Then, the k data being added to by the error correction bits are converted to optical signals having the different wavelengths λ_1 to λ_n , respectively, so as to be transmitted as the wavelength-multiplexed optical signals. This allows the optical transmission system to correct the errors at a receiver and transmit data with the high quality without increasing the transmission rate. In addition, since the error correction bits are generated for the k data at the same timing, an error correction decoding process has to be performed at the receiver. To do this, a frame synchronous byte may be added to each of the k data, each data containing the error correction bits.

The object of the present invention can be achieved by a further optical transmission system which is operable to form a set of k data by aligning data from k channel CH_1 to CH_k with each other, add an SOH containing error monitoring bytes B1 and B2 to the set of k data, generate and add a parity bit to the set of the k data so as to form a sequence of (k+1) data, convert the sequence of the (k+1) data to optical signals having different wavelengths, wavelength-multiplex the optical signals and send the multiplexed signals to an optical transmission line. At the receiver, after receiving the multiplexed signals through the optical transmission line, the received

multiplexed signals are separated into signals corresponding to wavelengths, respectively, and then the separated signals are converted to electrical signals. Subsequently, a parity check is performed on the basis of a sequence of $(k+1)$ data from the electrical signals, and another parity check corresponding to channels CH_1 to CH_k is carried out by means of an error check byte within the SOH. In this case, depending on results of the parity checks, a position of the error bit is located and the error bit may be corrected. Thus, the error correction can be achieved solely by additionally assigning the parity bit corresponding to a vertical parity to the data.

The object of the present invention can be achieved by a still further optical transmission system for serially transmitting data such as TDM (Time-Division Multiplexing) transmission data. The optical transmission system is operable to generate and add a set of $(n-k)$ error correction bits to k bits of the transmission data, convert the k bits of the transmission data and the $(n-k)$ error correction bits to different optical signals having different wavelengths, and the optical signals are multiplexed so as to be transmitted as wavelength-multiplexed signals through an optical transmission line. The optical transmission system further receives the wavelength-multiplexed signals through the optical transmission line, separates the received multiplexed signals into different signals having corresponding wavelengths, and perform error correction decoding process for the n bits corresponding to the transmission data by means of the $(n-k)$ error correction bits. That is to say, in this case, for a serial data of the k bits, the $(n-k)$ error correction bits are converted into the signals having the different wavelengths such that the serial data of k bits can be transmitted in parallel.

The object of the present invention can be achieved by a still further optical transmission system for transmitting data through k channels. The optical transmission system, at a transmitter, generates and adds $(n-k)$ error correction bits to k data present at the same timing so as to form a sequence of n data, multiplexes the sequence of the n data, converts the multiplexed data to optical signals and sends the optical signals to an optical line. The optical transmission system, at a receiver, receives the optical signals through the optical line, converts the received optical signals to electrical signals, separates the electrical signals into a sequence of n data and performs an error correction decoding on the k data from the sequence of the n data by means of the $(n-k)$ error correction bits. In this case, if a plurality of reserved channels exist in the channels available in a TDM (Time Division Multiplexing) transmission, the reserved channels can be assigned to the error correction bits. Alternatively, if a number of the error correction bits assigned to busy channels is more than that of the reserved channels, an error correction coding is performed only on some significant channels from the busy channels. It leads to that the number of the error correction bits within an error correction code is limited by the number of the reserved channels and the data transmitted through the significant channels can be transmitted using the error correction coding.

Other objects and further features of the present invention will be apparent from the following detailed description when read in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig.1 is a schematic diagram of a wavelength multiplexing transmission system in the prior art;

Fig.2 is a schematic diagram of a first embodiment of an optical transmission system according to the present invention;

Fig.3 is a diagram for explaining an encoder according to the first embodiment of the present invention;

Fig.4 is a diagram for explaining a decoder according to the first embodiment of the present invention;

Fig.5 is a schematic diagram of a second embodiment of an optical transmission system according to the present invention;

Fig.6 is a diagram for explaining a configuration of an STM-1 frame;

Fig.7 is a schematic diagram of an optical transmission system according to a third embodiment of the present invention;

Fig.8 is a schematic diagram of an optical transmission system according to a fourth embodiment of the present invention;

Fig.9 is a schematic diagram of an optical transmission system according to a fifth embodiment of the present invention;

Fig.10 is a schematic diagram of an optical transmission system according to a sixth embodiment of the present invention;

Fig.11 is a schematic diagram of an optical transmission system according to a seventh embodiment of the present invention;

Fig.12 is a schematic diagram of an optical transmission system according to an eighth embodiment of the present invention; and

Fig.13 is a schematic diagram of an optical transmission system according to a ninth embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

In the following, principles and embodiments of the present invention will be described with reference to the accompanying drawings.

Fig.2 shows a first embodiment of an optical transmission system according to the present invention. As shown in Fig.2, the optical transmission system comprises an optical transmission device 1 provided at a transmitting side, an optical transmission device 2 provided at a receiving side and an optical transmission line connecting the optical transmission device 1 and the optical transmission device 2. Hereinafter, the optical transmission device 1 provided at the transmitting side is assumed to be a transmitting-end station and the optical transmission device 2 provided at the receiving side is a receiving-end station.

The optical transmission system further comprises an SOH inserting unit 4, an encoder 5, a phase alignment unit 6, an electrical-optical converter (OS) 7, a wavelength-multiplexing unit 8, a wavelength-demultiplexing unit 11, an optical-electrical converter (OR) 12, a decoder 13 and an SOH terminating unit. These elements are included in either the transmitting-end station 1 or the receiving-end station 2, as described hereinafter. In this embodiment, transmission data are transmitted using both of SDH (Synchronous Data Hierarchy) and WDM (Wavelength Division Multiplexing) methods.

The transmitting-end station 1 includes the SOH inserting unit 4 that adds an individual SOH (Section Over Head) to each transmission data coming from k channels CH_1 to CH_k and the encoder 5 for error correction coding. For example, the encoder 5 may be such that the encoder 5 performs an operation of (n, k) Hamming coding. In this embodiment, the encoder 5 generates $(n-k)$ error correction bits for k bits corresponding to k data present at the same timing from

the channels CH_1 to CH_k .

The transmitting-end station 1 further includes the phase alignment unit 6 that is connected to the encoder 5. The encoder 5 provides a signal of all n bits comprising the k data from the channels and the generated $(n-k)$ error correction bits to the phase alignment unit 6. The phase alignment unit 6 compensates for a delay due to the error correction coding so as to phase all the n bits. The phase alignment unit 6 may be, for example, a delay circuit capable of aligning a delay time appropriately. The signals comprising the n bits in phase are then passed to the electrical-optical converter 7, which is also included in the transmitting-end station 1. The electrical-optical converter 7 converts the electrical signals of the n bit into optical signals having wavelengths λ_1 to λ_n , respectively.

The transmitting-end station 1 has the wavelength-multiplexing unit 8, which is provided by the optical signals from the electrical-optical converter 7, for wavelength-multiplexing the optical signals and delivering the multiplexed signals to the optical line 3.

The wavelength-multiplexing unit 8 may be constructed by a wavelength-combination unit for multiplexing the optical signals having the wavelengths λ_1 to λ_n together. It should be noted that the error correction bits are transmitted with the wavelengths different from those of the signals corresponding to the data from the channels CH_1 to CH_k . This leads to the fact that the transmission rate for the data coming from the channels CH_1 to CH_k is not adversely affected by the addition of the error correction bits. It should be also noted that reserved bits within the SOH are not used to transmit the error correction bits so as to overcome the problem caused by the conventional error correction method.

Therefore, according to the first embodiment of the present invention, it is advantageous that an error correcting coding scheme can be easily added to various existing WDM transmission systems.

5 The receiving-end station 2 comprises the wavelength-demultiplexing unit 11 for receiving the wavelength-multiplexed signals from the transmitting-end station 1 through the optical line 3 and separating the received wavelength-multiplexed
10 signals into n optical signals having wavelengths λ_1 to λ_n , respectively. The receiving-end station 2 further comprises the optical-electrical converter 12 being connected to the wavelength-demultiplexing unit 11 and for converting the n optical signals input from
15 the wavelength-demultiplexing unit 11 to corresponding electrical signals. The receiving-end station 2 has the decoder 13, which is connected to the optical-electrical converter 11 and receives and decodes the electrical signals.

20 The electrical signals received by the decoder 13 are formed by k bits, each corresponding to one of the channels CH_1 to CH_k , and $(n-k)$ error correction bits. Then, the decoder 13 performs error correction decoding by means of the k bits representing
25 the data from the channels CH_1 to CH_k and the $(n-k)$ error correction bits and sends the decoded signals to the SOH termination unit 14, which is also included in the receiving-end station 2. The SOH termination unit 14 terminates the SOHs and delivers the signals with the
30 SOHs to a succeeding device (not shown in Fig.2) as data representing the data coming from the channels CH_1 to CH_k .

 In this embodiment, the transmission data on the channels CH_1 to CH_k may be formed in accordance with
35 various transmission schemes such as a frame transmission scheme or an ATM (Asynchronous Transfer Mode) cell scheme. Since the phase alignment unit 6

is provided in the transmitting-end station 1, it is sufficient that the SOH inserting unit 4 adds the SOH to each of the data corresponding to the channels CH_1 to CH_k .

5 Fig.3 is a schematic diagram of an encoder for (n, k) Hamming coding according to the first embodiment of the present invention. Since Hamming coding is a well-known coding scheme, for a detail explanation thereof, it is recommended that a general
10 textbook concerning "communications" should be referred to. Briefly speaking, for any positive integer m , there is a Hamming code with parameters $k = 2^m - m - 1$ and $n = 2^m - 1$. For example, we consider a $k=4, n=7$ Hamming code. This means that the number
15 of the channels is $k=4$ and the number of the error correction bits is $(n-k)=3$. The encoder, illustrated in Fig.3, performs $(7, 4)$ Hamming coding. The encoder includes exclusive-OR logic circuits 15-1, 15-2 and 15-3. The data corresponding to the channels CH_1 to
20 CH_4 are denoted as $D1$ to $D4$, respectively, and the error correction bits generated by the encoder are denoted as $D5$ to $D7$, as shown in Fig.3. Thus, the encoder generates three error correction bits $D5$ to $D7$ for the four data $D1$ to $D4$. In this case, a generator matrix
25 G for this coding scheme is represented as:

$$G = \begin{pmatrix} 1 & 0 & 0 & 0 & 1 & 0 & 1 \\ 0 & 1 & 0 & 0 & 1 & 1 & 1 \\ 0 & 0 & 1 & 0 & 1 & 1 & 0 \\ 0 & 0 & 0 & 1 & 0 & 1 & 1 \end{pmatrix}$$

Then this coding scheme can perform one bit error correction with a minimum intersymbol distance of 3.

30 Fig.4 is a schematic diagram of a decoder according to the first embodiment of the present invention. The decoder is constructed to be a $(7, 4)$ Hamming code decoder such that its decoding scheme is

adapted to the encoder shown in Fig.3. The decoder includes exclusive-OR logic circuits 16-1, 16-2 and 16-3, inverters 17-1, 17-2 and 17-3, and AND logic circuits 18-1, 18-2, 18-3 and 18-4. In this case, a
5 check matrix for the decoder is represented as:

$$H = \begin{pmatrix} 1 & 1 & 1 & 0 & 1 & 0 & 0 \\ 0 & 1 & 1 & 1 & 0 & 1 & 0 \\ 1 & 1 & 0 & 1 & 0 & 0 & 1 \end{pmatrix}$$

Referring again to Fig.3, an operation of the encoder 5 of the transmitting-end station 1 is
10 explained. It is assumed that all the data D1 to D4 have value "1". After the (7, 4) Hamming coding, since the exclusive-OR circuits 15-1, 15-2 and 15-3 have the same behavior as that of a modulo-2 adder, the error correction bits D5 to D7 become "1" at the same timing.
15 Thus, the data D1 to D7 output by the encoder 5 are represented as "1111111."

With reference to Fig.4, the decoder 13 of the receiving-end station 2 is operable to make output signals from the exclusive-OR circuits 16-1, 16-2 and
20 16-3 to have a value of "0" in response to the received signals D1 to D7 representative of "1111111." In this case, the AND circuits 18-1 to 18-4 are operable to produce an output signal having a value of "0", and the exclusive-OR circuits 19-1 to 19-4 are operable
25 to allow the data D1 to D4, respectively, to pass through the corresponding exclusive-OR circuits. Therefore, the data D1 to D4 provided to the decoder 13 are directly output from the decoder 13 and include no errors.

30 Now, we consider that an error has occurred with one bit such that a true data D2="1" is replaced with an erroneous data D2="0" for the channel CH₂. In this case, each of the exclusive-OR circuits 16-1, 16-2 and 16-3 outputs a signal having a value of "1", and

each of the AND circuits 18-1, 18-3 and 18-4 generates a signal having a value of "0." However, the AND circuit 18-2 will output a signal "1." Then, the exclusive-OR circuit 19-2 receives a value of "0" on a line D2 and a value of "1" from the AND circuit 18-2 and generate "1" as a result of an exclusive-OR operation between "0" and "1". Thus, the data on the line D2 is inverted in the decoder 13 and the erroneous data D2 can be corrected. Other data D1, D3 and D4 having the true value and input to the decoder 13 are directly output from the decoder 13.

A second embodiment of an optical transmission system according to the present invention is shown in Fig.5. As shown in Fig.5, the optical transmission system comprises a transmitting-end station 21, a receiving-end station 22, an optical transmission line connecting the transmitting-end station 21 and the receiving-end station 22. The transmitting-end station 21 includes an SOH inserting unit 24, a parity generator 25, a phase alignment unit 26, an electrical-optical converter (OS) 27 and a wavelength-multiplexing unit 28. The receiving-end station 22 includes a wavelength-demultiplexing unit 31, an optical-electrical converter (OR) 32, a parity detector 33, an SOH terminating unit 34 and an error correction unit.

At the transmitting-end station 24, the SOH inserting unit 24 adds an individual SOH (Section Over Head) to each transmission data coming from k channels CH_1 to CH_k and supplies the k transmission data with the individual SOH to the parity generator 25. The parity generator 25 calculates a parity bit for the supplied k transmission data and output the calculated parity bit together with the k transmission data, and thus, passing (k+1) data to the phase alignment unit 26. The phase alignment unit 26 compensates for a delay caused by the parity generator 25 and sends resulting

At the receiving-end station 22, the wavelength-demultiplexing unit 31 receives the wavelength-multiplexed signals through the optical transmission line 23 and separates them into the optical signals having the different wavelengths λ_1 to λ_{k+1} . The optical signals corresponding to the wavelengths λ_1 to λ_{k+1} are passed to the optical-electrical converter 32 and then converted to (k+1) electrical signals in the optical-electrical converter 32. Then, the (k+1) electrical signals are transferred from the optical-electrical converter 32 to the parity detector 33.

35 The SOH terminating unit 34 terminates the SOHs of the k data conveyed on the k channels CH₁ to CH_k and sends the k transmission data to the error

correction unit 35. Then the error correction unit 35 performs the error correction on the transmission data and delivers the error corrected transmission data to a further device (not shown in Fig.5).

5 Fig.6 is a diagram for explaining a configuration of an STM-1 (Synchronous Transfer Module Level One) frame. This STM-1 frame is used for the SDH and its bit rate is 155.52 Mbps. The STM-1 signals are formed by multiplexing three STM-0 signals having the
10 bit rate of 51.84 Mbps. For example, STM-4 signals formed by multiplexing the four STM-1 signals have a bit rate of 622.08 Mbps. The SOH within the STM-1 signal is represented as a 9 row by 9 column structure as depicted in Fig.6, and a payload is represented as
15 a 9 row by 261 column structure.

The SOH contains frame synchronous bytes A1 and A2, a STM identifier byte C1, a monitoring byte B1, also called BIP-8 (Bit Interleaved Parity 8), an orderwire byte E1 for voice communications, a user byte
20 F1 for specifying a failure, data link bytes D1, D2 and D3 for DCC (Data Communication Channel), an AU pointer bytes H1, H2 and H3, a monitoring byte B2, also called a BIP-Nx24 (Bit Interleaved Parity Nx24) byte, control bytes K1 and K2 for APS (Automatic Protection
25 Switch), data link bytes D4 to D12 for data communication channels, reserved bytes Z1 and Z2, and an orderwire byte E2 for voice communications. Blank bytes and bytes marked with X are reserved or undefined bytes.

30 The error monitoring byte B1 for a current frame is derived from the previous frame by calculating parity bits for each bit position over the entire bytes. The parity detector 33 in the receiving-end station
22, as shown in Fig.5, can perform parity check for
35 each bit position by calculating the parity bits for every bit position over the entire bytes in the current frame and referring to the B1 byte of the SOH in the

next frame.

The error monitoring byte B2 represents a bit interleaved parity- $N \times 24$, where N is a level number for the STM-N. The byte B2 is derived from the previous frame by grouping BIP- $N \times 24$ s from the previous frame into a block and calculating parity bits for each bit position over the entire bytes in the block. Assuming N is equal to 1, as shown in Fig.6, the parity bits for the 24 bits are calculated and added to the frame in accordance with a bit order, and thus resulting in 3 bytes as the parity bits. Any suitable bit generation and addition schemes, as well as correspondingly suitable bit detection schemes can be applied to the scheme for generating, adding and detecting the error monitoring bits B1 and B2.

The parity detector 33 in the receiving-end station 22 is operable to perform parity check on each bit position within the received frame by means of either or both of the error monitoring bits B1 and B2. In other words, the parity detector 33 can perform horizontal parity check. At the same time, the parity detector 33 performs another parity check, i.e. vertical parity check, by means of the $(k+1)$ data comprising the k data corresponding to the channels CH_1 to CH_k followed by the parity bits.

As the parity detector 33 detects a vertical parity error in the current frames, it is appreciated that some of the currently received frames corresponding to the channels CH_1 to CH_k contain one bit error. The parity detector 33 also detects a horizontal parity error in order to identify the channel and the bit position where the parity error occurs. Thus, the parity detector 33 can determine the position of the error bit on the basis of the channel and the bit position of the parity error.

The position of the error bit is determined as follows. For example, a bit sequence comprising

bits 1 to 8 contained in the payload, as depicted in Fig.6, appears repeatedly at times t_1 , t_2 , t_3 and so on. Then, one parity check using the error monitoring bit B1 is performed so as to detect the parity error at a position of the bit 3 in the bit sequence and the other parity check is also performed using the bit $(k+1)$ representing the parity bit following the transmission data applied to the parity detector 33 at the time t_{11} in order to detect the parity error. As a result of the parity checks, it is determined that a transmission error has occurred at a bit position, as illustrated as a shaded box in Fig.6. Subsequently, a signal representing the bit error occurring position is sent to the error correction unit 35 for correcting the bit with a transmission error. And thus, the error bit can be corrected. As described above, the bit error occurring position can be determined by a combination of the vertical parity check and the horizontal parity check, the erroneous bit can be easily corrected by holding the k data conveyed on the k channels CH_1 to CH_k until the bit error occurring position is detected in the SOH terminating unit 34 or the error correction unit 35.

In the above-mentioned first embodiment of the present invention, when the $(7, 4)$ Hamming coding is employed, redundant bits comprising three bits have to be added to the transmission data by performing the error correction coding. On the contrary, in the second embodiment of the present invention, as shown in Fig.4, it is sufficient that only a single additional bit is added, as a parity bit, to the transmission data. This means that a combination of the parity generator 25 and the parity detector 33, as shown in Fig.4, may be much simply constructed than that of the error correction encoder 5 and the error correction decoder 13, as shown in Fig.2. Thus, a high quality transmission can be achieved by the optical

transmission system according to the second embodiment of the present invention without making structures of the transmitting-end station 21 and the receiving-end station 22. Advantageously, according to the
5 second embodiment of the present invention, data rates for primary data on the channels CH_1 to CH_k are not adversely affected by the parity bit. This is because the parity bit is transmitted over the optical transmission line 23 after being converted to a
10 wavelength other than those of the primary data.

Furthermore, in one variation of the second embodiment of the present invention, a further parity check can be implemented in addition to the parity check using the monitoring bits B1 and B2. In this case, at
15 the transmitting-end, one frame is divided into a plurality of blocks, a parity bit is calculated for each block, and the calculated parity bits are transmitted in reserved bits within the SOH. Then, at the receiving-end, the parity bits corresponding to
20 the blocks are received, and the further parity check is performed based on the received parity bits for the blocks. In other words, a small number of parity bits, this number being equal to a number of the blocks, are added to the SOH at the reserved bits thereof, so that
25 the number of the bits capable of being corrected can be increased.

Fig.7 is a schematic diagram of an optical transmission system according to a third embodiment of the present invention. The optical transmission
30 system comprises a transmitting-end station 41, a receiving-end station 42 and an optical transmission line 43 for connecting the transmitting-end station 41 and the receiving-end station 42.

The transmitting-end station 41 includes a
35 frame generating and SOH inserting unit 44, an encoder 45, an electrical-optical converter (OS) 46 and a wavelength-multiplexing unit 47. The receiving-end

station 42 includes a wavelength-demultiplexing unit 51, an optical-electrical converter (OR) 52, a memory unit 53, a decoder 54, an SOH terminating unit 55 and a top-of-frame detector 56.

5 At the transmitting-end station 41, the
frame generating and SOH inserting unit 44 generates
a frame for each of channels CH_1 to CH_k , such that tops
from every frames are synchronous with others, inserts
a frame number for each of the channels CH_1 to CH_k into
10 a reserved byte within an SOH, and sends the frames
to the encoder 45. The encoder 45, for example,
performing a (n, k) Hamming coding, may accomplish an
error correction coding on every bits other than k frame
synchronization bytes within the SOH over the frame
15 and add the frame synchronization byte for a sequence
of $(n-k)$ error correction bits.

In other words, the frame generating and SOH
inserting unit 44 adds the frame synchronization byte
for the n channels and sends control information
20 including the frame synchronization byte to the
encoder 45. Then, the encoder 45 generates the $(n-k)$
error correction bits for the k data on the k channels,
respectively, without taking the frame
synchronization bytes into account in response to the
25 control information received from the unit 44 and adds
the generated $(n-k)$ error correction bits to the k data.
Thus, the n data, n is calculated from an equation:

$$n = (n-k) + k$$

are generated by the encoder 45. This means that the
30 encoder 45 generates k sequences of the transmission
data for the k channels and $(n-k)$ sequences of the error
correction bits. The encoder 45 also adds the frame
synchronization bit to the $(n-k)$ sequences of the error
correction bits. Therefore, all of the n sequences are
35 individually added to by the frame synchronization
byte.

The electrical-optical converter 46

converts the n sequences received from the encoder 45 into n optical signals having different wavelengths λ_1 to λ_n , and then sends the optical signals to the wavelength-multiplexing unit 47. The wavelength-multiplexing unit 47 multiplexes the n optical signals and sends the multiplexed signals to the receiving-end station 42 over the optical transmission line 43.

At the receiving-end station 42, the wavelength-demultiplexing unit 51 receives the multiplexed signals through the optical transmission line 43, and then separates the multiplexed optical signals into optical signals having the different wavelengths λ_1 to λ_n . The separated optical signals are applied to the optical-electrical converter 52, where the separated optical signals are converted to electrical signals. The optical-electrical converter 52 stores the electrical signals to the memory unit 53 and supplies the electrical signals to the top-of-frame detector 56. Then, the top-of-frame detector 56 determines a top of every frame of the n sequences by detecting each frame synchronization byte for the n sequences. Then the top-of-frame detector 56 reads the n sequences from the memory unit 53 by controlling a read-out timing so as to align the top of the frame for each of the n sequences with the others, and sends the read out n sequences to the decoder 54.

However, in a long distance transmission environment, even if the wavelength-multiplexed signals are sent from the transmitting-end station 41 via the optical transmission line 43, the optical signals having the different wavelengths may be usually received by the receiving-end station 42 at different timings. This is because the fiber may have different transmission rates for the n sequences having the different wavelengths. According to the third embodiment of the present invention, advantageously, this problem is overcome by

controlling the read out timing for the n sequences stored in the memory unit 53 in order to allow the top of each of the n sequences to be synchronous with the others, and thus keeping the n sequences in phase. It is noted that the memory unit 53 may be formed by an FIFO buffer suitable for controlling the read out timing.

The decoder 54 is designed so as to be reversibly operable with the encoder 45 such that the decoder 54 performs an error correction decoding which is adapted to the error correction coding implemented by the encoder 45. The decoder 54 can correct erroneous data present at the channels CH_1 to CH_k and send the error corrected k data to the SOH terminating unit 55. The SOH terminating unit 55 terminates the SOHs of the k data and sends the k data to a further processing stage.

In the third embodiment of the present invention, the frame generating and SOH inserting unit 44 in the transmitting-end station 41 is followed by the encoder 45. Alternatively, the frame generating and SOH inserting unit 44 may be divided into a frame generating unit and an SOH inserting unit such that the frame generating unit is followed by the encoder 45 which is followed by the SOH inserting unit. In this case, at the receiving-end station 42, the top-of-frame detector can detect the tops of the frames and keep the tops of the frames in phase, and then, the decoder 54 can perform the error correction decoding.

As earlier described, the optical transmission line 43 has different transmission rates of the optical signals depending on the wavelengths of the optical signal. For example, in a high speed, long distance transmission with 100 Gbps, the phases of the optical signals that are demultiplexed by the wavelength-demultiplexing unit 51 may deviate from the others. In order to avoid this deviation of the phases,

it is ensured that the encoder 54 can perform the error correction decoding on the high speed transmission data by aligning the frames in phase. In this case, the in-phase frames can be achieved from the memory unit 53 by detecting the tops of the frames on the basis of frame synchronization bytes added to the frames in order to keep the frames in phase at the transmitting-end station 41.

Fig.8 is a schematic diagram of an optical transmission system according to a fourth embodiment of the present invention. The optical transmission system comprises a transmitting-end station 61 and a receiving-end station 62 and is provided with optical relay transmission devices 63 and 64 arranged between the transmitting-end station 61 and the receiving-end station 62. The optical transmission system further includes a first optical transmission line 65 for connecting the transmitting-end station 61 and the optical relay transmission device 63, a second optical transmission line 66 for connecting the optical relay transmission device 63 and the optical relay transmission device 66, and a third optical transmission line 67 for connecting the optical relay transmission device 64 and the receiving-end station 62. In the optical transmission system, a high quality transmission of wavelength-multiplexed signals can be achieved between the optical relay transmission devices 63 and 64 via the second optical transmission line 66. As shown in Fig.8, the optical relay transmission device 63 includes a wavelength-demultiplexing unit 71, an encoder 72, a wavelength converter 73, a phase alignment unit 74 and a wavelength-multiplexing unit 75. The optical relay transmission device 64 includes a wavelength-demultiplexing unit 76, a decoder 77 and a wavelength-multiplexing unit 78.

The optical relay transmission device 63 may,

for example, be operable to perform an error correction coding and a wavelength multiplexing in order to function in the same manner as the transmitting-end station 1 shown in Fig.2. The optical relay

- 5 transmission device 64 may also be operable to perform a wavelength demultiplexing and an error correction decoding in order to function in the same manner as the receiving-end station 2 in Fig.2.

- 10 The wavelength-demultiplexing unit 71 separates the received signals into k optical signals having wavelengths λ_1 to λ_k and supplies the k optical signals to the encoder 72 for performing the error correction coding.

- 15 The encoder 72 may be formed by an optical logic circuit and perform the error correction coding with respect to the optical signals without converting the optical signals to electrical signals. Assuming that a (n, k) Hamilton code is applied to the encoder 72, then the encoder 72 generates $(n-k)$ error
20 correction bits. The wavelength converter 73 converts the wavelengths for the $(n-k)$ error correction bits generated and received from the encoder 72 to wavelengths λ_{k+1} to λ_n other than the wavelengths λ_1 to λ_k of the k optical signals. Then, the phase
25 alignment unit 74 receives the k optical signals having the wavelengths λ_1 to λ_k and corresponding to the channels CH_1 to CH_k from the encoder 72 and $(n-k)$ error correction bits having the wavelengths λ_{k+1} to λ_n . Thus, the phase alignment unit 74 receives n optical
30 signals in total.

- The phase alignment unit 74 may be also formed by an optical logic circuit. The phase alignment unit 74 compensates for a delay due to a processing of the encoder 72, matches the phase of each of the n optical
35 signals with the others, and sends the n optical signals in phase to the wavelength-multiplexing unit 75. The wavelength-multiplexing unit 75 multiplexes the n

optical signals and delivers the multiplexed optical signals to the optical transmission line 66.

Alternatively, the optical relay transmission device 63 may be arranged so as to convert the k optical signals separated by the wavelength-demultiplexing unit 71 to electrical signals. In this case, the optical relay transmission device 63 performs an error correction coding in the same manner as described in the first embodiment, as shown in Fig. 2, and converts the k coded electrical signals along the (n-k) generated error correction bits to n optical signals by an electrical-optical converter. In this configuration, the wavelength converter 73 can be dispensed with and the electrical-optical converter are provided at a succeeding stage to the phase alignment unit 74, such that the n electrical signals are converted to the n optical signals having the wavelengths λ_1 to λ_n and supplies the n optical signals to the wavelength-multiplexing unit 75.

The decoder 77 in the optical relay transmission device 64 may be formed by an optical logic circuit. In this case, the n optical signals, having the wavelengths λ_1 to λ_n , separated by the wavelength-demultiplexing unit 76 are directly applied to the decoder 77, where the error correction decoding is performed on the n optical signals. Then, the k decoded optical signals having the wavelengths λ_1 to λ_k are provided to the wavelength-multiplexing unit 78 for multiplexing the k optical signals so as to be delivered to the receiving-end station 62 via the optical transmission line 67. As a result, the optical signals input to the optical relay transmission device 64 can be processed in the optical relay transmission device 64 and then be delivered to the optical transmission line 67 without being converted to the electrical signals. Alternatively, the optical relay transmission device 64 may be

signals, perform the error correction decoding on the received multiplexed optical signals, determine whether the error has been detected or not. If the error has been detected, the optical relay
5 transmission devices 63 and 64 perform the error correction coding in order to allow the error to be corrected and multiplex the error corrected optical signals. Otherwise, the optical relay transmission devices 63 and 64 directly pass the received
10 multiplexed optical signals to the following optical line.

Fig.9 is a schematic diagram of an optical transmission system according to a fifth embodiment of the present invention. The optical transmission
15 system implements a TDM (Time Division Multiplex) transmission. The optical transmission system comprises a transmitting-end station 81, a receiving-end station 82 and an optical transmission line for connecting the transmitting-end station 81
20 and the receiving-end station 82, as shown in Fig.9.

The transmitting-end station 81 includes an encoder 84, a phase alignment unit 85, electrical-optical converters (OS1, OS2) 86 and 87, and a wavelength-multiplexing unit 87. The receiving-end
25 station 82 includes a wavelength-demultiplexing unit 91, optical-electrical converters (OR1, OR2) 92 and 93, and a decoder 94.

We consider that a number of bits assigned to a time slot used for TDM equals to k . In this case,
30 the encoder 84 implements a (n, k) Hamming coding and generates $(n-k)$ error correction bits. It is noted that the time slot or a frame is a non-limiting example of the data to be error correction coded. For example, the error correction coding may be applied to a series
35 of data by dividing the series of the data into any blocks containing k bits and performing the (n, k) Hamming coding.

The phase alignment unit 85 is operable so as to match a top of the (n-k) error correction bits with the top of k bits representing primary signals. To do this, the phase alignment unit 85 aligns the phases of the (n-k) error bits. The primary signals having the k bits are converted to an optical signal having a wavelength λ_1 by the electrical-optical converter 86 and the phase aligned (n-k) error bits are converted to an optical signal with a wavelength λ_2 by the electrical-optical converter 87. Then the wavelength-multiplexing unit 88 multiplexes the optical signal with the wavelength λ_1 and another optical signal with wavelength λ_2 and delivers the multiplexed signals to the receiving-end station 82 via the optical transmission line 83. Thus, the (n-k) redundant bits representing the error correction bits can be transferred without affecting a transmission rate for the k bits representing the primary signal.

Assuming that the encoder 84 performs the (7, 4) Hamming coding, as shown in Fig.3, a series of four bits, D1 to D4, are input to a shift register. When the four bits D1 to D4 are stored in the shift register at the same time, redundant three bits D5 to D7 are concurrently calculated by means of a parallel output comprising the four bits D1 to D4. Then the four bits D1 to D4 are applied to the electrical-optical converter 86 in series and the redundant three bits D5 to D7 are applied to the electrical-optical converter 87 in series. Alternatively, the phase alignment unit 85 may be dispensed with by appropriately controlling a timing for outputting the four serial bits D1 to D4 and the redundant three serial bits D5 to D7.

Though the phase alignment unit 85, as shown in Fig.9, is provided between the encoder 84 and the electrical-optical converter 87, the phase alignment unit 85 may be provided between the encoder 84 and the

electrical-optical converter 86 such that a difference
between processing times required for the primary
signal having the k bits and the $(n-k)$ redundant bits.
Typically, the above-mentioned numeric numbers k and
5 n are selected such that the relation between k and
 $(n-k)$ is written as:

$$k > (n-k).$$

Preferably, in order to facilitate a frequency
division of clock signals, these two numerical numbers
10 are selected such that k equals to a multiple of $(n-k)$.

At the receiving-end station 82, the
wavelength-demultiplexing unit 91 separates the
multiplexed optical signals into optical signals
having wavelengths λ_1 and λ_2 and passes the separated
15 two optical signals to the optical-electrical
converters 92 and 93, where the optical signals are
converted to k -bits and $(n-k)$ -bits electrical signals.
The decoder 94 receives the k bits representing the
primary signal from the optical-electrical converter
20 92 as well as the $(n-k)$ bits representing the redundant
bits, and performs an error correction decoding.
Therefore, this optical transmission system can
automatically correct error bits due to transmission
errors. Assuming that this decoder 94 employs the (7,
25 4) Hamming code, a decoding scheme, as shown in Fig.4,
can be applied to the decoder 94. This means that the
decoder 94 receives in parallel the data $D1$ to $D7$ that
are serially input to the receiving-end station 82,
correct any errors included the data $D1$ to $D4$, convert
30 the error corrected data $D1$ to $D4$ into a parallel format,
and outputs the data $D1$ to $D4$ in parallel.

It should be noted that, according to the
fifth embodiment of the present invention, a
transmission rate for the primary signal could be
35 maintained at the transmission rate achieved when no
error correction bits are added. Therefore,
advantageously, the existing optical transmission

system can be improved with respect to a transmission quality by providing the encoder 84 and the wavelength-multiplexing unit 88 at the transmitting-end station as well as the

5 wavelength-demultiplexing unit 91 and the decoder 94 for error correction decoding at the receiving-end station. Furthermore, the primary signal may not be limited to TDM signals, but may be extended to, for example, STM-N signals for one channel, as earlier

10 described, by wavelength-multiplexing and transferring error correction bits with different wavelengths. Also, in this case, since the error correction bits do not occupy reserved bytes within an SOH, a high quality transmission can be achieved

15 using this error correction-coding scheme.

Fig.10 is a schematic diagram of an optical transmission system according to a sixth embodiment of the present invention. The optical transmission system comprises a transmitting-end station 101, a

20 receiving-end station 102 and an optical transmission line connecting the transmitting-end station 101 and the receiving-end station 102.

The transmitting-end station 101 includes an encoder 104, a multiplexing and frame generating unit

25 105 and an electrical-optical converter (OS) 106.

The receiving-end station 102 includes an optical-electrical converter (OR) 107, an SOH terminating and separating unit 108 and a decoder 109.

We consider that an n-multiplexing TDM

30 transmission apparatus is operable so as to perform a time-division multiplexing with data for k channels CH_1 to CH_k . When the (n-k) channels CH_{k+1} to CH_n are reserved, the encoder 104 at the transmitting-end station 101 performs a coding such as a (n, k) Hamming

35 coding so as to generate (n-k) error correction bits for the data conveyed on the k channels CH_1 to CH_k . Then, the multiplexing and frame generating unit 105

time-division multiplexes the complete data for the
n channels while the multiplexing and frame generating
unit 105 adds frame synchronization patterns to the
multiplexed data in order to produce frames. The
5 multiplexed data formed by the frames are transferred
to the electrical-optical converter 106 where the
multiplexed data with the frame synchronization
patterns are converted to optical signals so as to be
transmitted to the receiving-end station 102 through
10 the optical transmission line 103.

At the receiving-end station 107, the
optical-electrical converter 107 converts the
received multiplexed optical signals to electrical
signals and sends the electrical signals to the SOH
15 terminating and separating unit 108. The SOH
terminating and separating unit 108 detects the frame
synchronization patterns, makes the frame to be
synchronous with the others and separates the
time-division multiplexed signals. The n separated
20 signals corresponding to the n channels CH_1 to CH_n are
supplied to the decoder 109. The decoder 109 performs
an error correction decoding based on the k bits
representing the primary signal and the (n-k) bits
representing the error correction bits, and then
25 delivers the decoded signals to a further stage as the
data on the available k channels CH_1 to CH_k . In this
case, since the frame synchronization is performed at
both of the transmitting-end station 101 and the
receiving-end station 102, a phase alignment unit can
30 be dispensed with.

A number of the reserved channels capable of
being used as the channels for transmitting the error
correction bits may be changed due to a modification
of a configuration of the optical transmission system.
35 Advantageously, according to the sixth embodiment of
the present invention, the encoder 104 may be adapted
so as to perform the appropriate coding depending on

numbers of the available channels and the reserved channels. Alternatively, if the number of the reserved channels decreases to one, then the reserved channel may be used for a parity bit. In this case, the optical transmission system can be reconstructed so as to perform an error correction by specifying a bit position where a transmission error occurs by means of monitoring bytes B1 and B2 within an SOH of an STM-N, as earlier described.

Fig.11 is a schematic diagram of an optical transmission system according to a seventh embodiment of the present invention. The optical transmission system comprises a transmitting-end station 111, a receiving-end station 112 and an optical transmission line 113 connecting the transmitting-end station 111 and the receiving-end station 112.

The transmitting-end station 111 includes an encoder 114, an identification signal-inserting unit 115, a multiplexing unit 116 and an electrical-optical converter (OS) 117. The receiving-end station 112 includes an optical-electrical converter (OR) 118, a separator 119, an identification signal detector 120 and a decoder 121.

We consider a similar environment to that of Fig.10 where there are n channels CH_1 to CH_n comprising k channels CH_1 to CH_k used for transmitting data and other $(n-k)$ channels CH_{k+1} to CH_n reserved for future. However, in the seventh embodiment, a coding is performed using any m channels selected from the effective k channels. For example, the encoder 114 may perform a $(n+m-k, m)$ Hamming coding. An example of a set of these variables is $n=9$, $k=6$ and $m=4$. Then, the encoder 114 performs the $(7, 4)$ Hamming coding.

With respect to other effective channels rather than the channels used for the Hamming coding, the data on these channels are passed through the encoder 114 and the identification signal-inserting

unit 115 without being affected.

The data on the m channels to be encoded are marked with an identification signal, inserted by the identification signal-inserting unit 115, which
5 specifies an order of coding. The identification signal may be inserted into a control field located at a top of a frame from the channel to be error correction coded or a J1 byte within a line over head contained in a payload for an STM-N frame.

10 The multiplexing unit 116 time-division multiplexes the k data on the k channels CH_1 to CH_k and the generated $(n-k)$ error correction bits. In this case, the bits 1 to k and the bits $(k+1)$ to n are multiplexed as the channels 1 to n , as shown in Fig.11.
15 The time-division-multiplexed signals are then provided to the electrical-optical converter 117 and converted to optical signals so as to be delivered to the optical transmission line 113.

At the receiving-end station 112, the
20 optical-electrical converter 118 receives the multiplexed optical signals from the optical transmission line 113 and converts the received optical signals to electrical signals. The electrical signals are passed to the separator 119, where the
25 electrical signals that have been time-division multiplexed are separated into n signals corresponding to the n channels, respectively. The separated n signals are supplied to the identification signal detector 120. The identification signal detector 120
30 detects the identification signals added by the identification signal-inserting unit 115 at the transmitting-end station 111 from the separated n signals in order to determine the signals to be decoded. The signals, which do not include the identification
35 signal, are directly passed through the decoder 121 to a further stage. The other signals containing the identification signal are transferred to the decoder

121. The decoder 121 receives the signals to be decoded in accordance with the order specified by the identification signal and performs the error correction decoding.

5 Therefore, according to the seventh embodiment of the present invention, advantageously, the error correction coding can be applied to very significant channels selected from the effective channels, even if a number of the effective channels
10 is considerably high.

Fig.12 is a schematic diagram of an optical transmission system according to an eighth embodiment of the present invention. The optical transmission system comprises a transmitting-end station 131, a
15 receiving-end station 132 and an optical transmission line 133 connecting the transmitting-end station 131 and the receiving-end station 132.

The transmitting-end station 131 includes an encoder 134, an identification signal-inserting unit
20 135, a multiplexing unit 136 and an electrical-optical converter (OS) 137. The receiving-end station 132 includes an optical-electrical converter (OR) 138, a separator 139, an identification signal detector 140 and a decoder 141.

25 At the transmitting-end station 131 the multiplexing unit 136 is operable to time-division multiplex n channels and the separator 139 at the receiving-end station 132 is operable to separate the time-division-multiplexed channels into n channels.
30 We consider that any m ($< k$) channels selected from the n channels are subject to an error correction coding, and that $(k-m)$ channels are used for fixed data to be error correction coded by the encoder 134. For example, $(k-m)$ data on the channels CH_1 to $CH_{(k-m)}$ are input to
35 the multiplexing unit 136, data on the channels $CH_{(k-m+1)}$ to CH_k are input to the encoder 134 and the fixed data $1'$ to $(k-m)'$ corresponding to the channels CH_1 to $CH_{(k-m)}$

are input to the encoder 134. In this manner, the encoder 134 performs, for example, a (n, k) Hamming coding on the basis of the k data comprising m data on the channels and the $(k-m)$ fixed data.

5 As a result, the encoder 134 outputs the $(k-m)$ fixed data $1'$ to $(k-m)'$, the m data on the channels $CH_{(k-m+1)}$ to CH_k and $(n-k)$ error correction bits. Among the output data from the encoder 134, the m data corresponding to the channels $CH_{(k-m+1)}$ to CH_k and the
10 $(n-k)$ error correction bits, $(k+1)$ to n bits, are used in the identification signal-inserting unit 135, such that the identification signal is inserted into each data. The m data corresponding to the channels $CH_{(k-m+1)}$ to CH_k and the $(n-k)$ error correction bits are sent to
15 the multiplexing unit 136 together with their identification signal. Then, the multiplexing unit 136 receives and time-division multiplexes the n data consisting of the $(k-m)$ data on the channels CH_1 to $CH_{(k-m)}$, m data corresponding to the channels $CH_{(k-m+1)}$ to CH_k and
20 the $(n-k)$ error correction bits. The time-division-multiplexed signals are transferred to the electrical-optical converter 137 so as to be converted to optical signals and delivered to the receiving-end station 132 via the optical transmission line 133.

25 At the receiving-end station 132, the optical-electrical converter 138 receives and converts the multiplexed optical signals to electrical signals. The electrical signals are sent to the separator 139 by which the electrical signals are
30 separated into signals corresponding to channels CH_1 to CH_n and, thereafter, transferred to the identification signal detector 140. The identification signal detector 140 detects the identification signals attached to the data at the
35 transmitting-end station 131 and provides the data corresponding to the detected identification signals to the decoder 141 according to the order specified

by the identification signal. The other data without specified by the identification signal are directly passed to a further stage without being decoded, because they have not been subject to the error correction coding. The decoder 141 receives the data from the identification signal detector 140, that is to say, the data on the channels $CH_{(k-m+1)}$ to CH_n being subject to the error correction coding at the transmitting-end station 131 as well as the same fixed data 1' to (k-m)' as input to the encoder 134. Subsequently, the decoder 141 performs an error correction decoding and outputs the error corrected data on the channels $CH_{(k-m+1)}$ to CH_n .

According to the eighth embodiment of the present invention, it is advantageous that a high quality transmission can be achieved for any channels within the transmission system by effectively making use of reserved channels. Obviously, the coding scheme employed in the encoder 134 should not be limited to the above-mentioned Hamming coding, but any suitable error correction schemes can be applied to the transmission system. Of course, the decoder 141 at the receiving-end station 132 should be constructed so as to be adapted to the coding scheme implemented by the encoder 134.

Fig.13 is a schematic diagram of an optical transmission system according to a ninth embodiment of the present invention. The optical transmission system comprises a transmitting-end station 151, a receiving-end station 152 and optical transmission lines 153-1 to 153-n connecting the transmitting-end station 151 and the receiving-end station 152.

The transmitting-end station 151 includes a frame-generating and SOH-inserting unit 154, an encoder 155 and an electrical-optical converter (OS) 156. The receiving-end station 152 includes an optical-electrical converter (OR) 157, a memory unit

158, a decoder 159, an SOH terminating unit 160 and a frame number and top detector 160.

The optical transmission system according to the ninth embodiment is similar to that of Fig. 7, except for optical signals not being multiplexed. As shown in Fig. 13, the optical signals are transmitted through the plurality of the optical transmission lines 153-1 to 153-n, which correspond to channels CH_1 to CH_n and transmit the data on the channels CH_1 to CH_n with error correction bits. The frame-generating and SOH-inserting unit 154 is operable to add an SOH to each of the channels CH_1 to CH_n concurrently at the same timing and insert each frame number to a reserved byte within each SOH. Alternatively, each frame number may be inserted into a J1 byte within a line overhead in a virtual container. In any cases, the data on the channels CH_1 to CH_k , i.e. primary signals, are input to the encoder 155 in phase.

As an example, it is assumed that the encoder 155 performs a (n, k) Hamming coding, that a frame synchronization byte within each SOH is not encoded, and that the frame synchronization byte is added to each sequence of error correction bits. In this case, the frame synchronization byte is attached to every one of the sequences 1 to n and the sequences are applied to the electrical-optical converter 156. The electrical-optical converter 156 converts the n sequences to n optical signals and transmits the n optical signals to the receiving-end station 152 through the optical transmission lines 153-1 to 153-n, respectively.

At the receiving-end station 152, the optical-electrical converter 157 converts the received n optical signals to electrical signals and provides the converted electrical signals to the frame number and top detector 161 and the memory unit 158.

The frame number and top detector 161 detects

the number and top of each frame formed by the optical signals delivered from the optical transmission lines 153-1 to 153-n regardless of differences of wavelengths or characteristics between the optical signals. Then, the frame number and top detector 161 can matches a phase of any bits directed to the decoder 159 with each other by controlling a read out timing of the bits from the memory unit 158. Consequently, the decoder 159 can receive all the n bits in phase and perform an error correction process in conformity with the error correction coding implemented at the transmitting-end station 151. Thereafter, the SOH terminating unit 160 receives the frames and terminates the SOH within each frame so as to transfer the frames, i.e., the data on the channels CH_1 to CH_k to a further stage, not shown in Fig.13.

Further, the present invention is not limited to these embodiments, but variations and modifications may be made without departing from the scope of the present invention. For example, any suitable coding scheme, such as error correction codes, cyclic codes, BCH (Bose-Chaudhuri-Hocquenghem) codes, Fire code, and so on, can be applied to the present invention as the coding scheme. In addition, an encoder and a decoder as well as a parity generator and a parity detector, as described in the embodiments and illustrated in the drawings, may be constructed using an optical logic circuit such that an error correction coding and decoding, as well as, a parity generating and detecting can be directly applied to the optical signals. In this case, since those logical operations applied to the optical signals are implemented based on an amplitude modulation for the optical signals, the error correction and parity operations can be applied to the optical signals with different wavelengths by simply introducing a wavelength conversion.

It can be summarized that according to the present invention, a transmitting-end optical transmission device or station is operable to form k data by aligning phases of data on k channels with each other and for generating (n-k) error correction bits for the k data and adding said (n-k) error correction bits to the k data, convert both the k data and the (n-k) error correction bits to n optical signals having different wavelengths and for wavelength-multiplex the n optical signals so as to be delivered to the optical transmission line. A receiving-end optical transmission device or station is operable to separate the wavelength-multiplexed optical signals from the optical transmission line into n optical signals, each corresponding to one of the different wavelengths, and generates k error corrected data by correcting error bits using the (n-k) error correction bits contained in the n separated optical signals. It is advantageous that a high quality transmission can be achieved without increasing a transmission rate for the k transmission data forming primary signals. Also, the present invention provides an advantage that the high quality transmission can be achieved without occupying reserved bytes within an SOH when it is applied to a SDH transmission.

According to another aspect of the present invention, an optical transmission system is characterized in that a transmitting-end optical transmission device or a station is operable to form data by adding an SOH (Section Over Head) including at least one error monitoring byte to data on k channels and aligning phases of the data with each other and generate a parity bit for the k data and adding the parity bit to said k data. The transmitting-end optical transmission device is also operable to convert the k data and the parity bit to (k+1) optical signals having different wavelengths and

wavelength-multiplex the $(k+1)$ optical signals so as to be delivered to the optical transmission line. The receiving-end optical transmission device or station is operable to separate the wavelength-multiplexed optical signals from the optical transmission line into $(k+1)$ optical signals, each corresponding to one of the different wavelengths, and, to correct error bits based on one result of a parity check for the separated $(k+1)$ optical signals and the other result of a parity check using the at least one error monitoring byte within the SOH. In this case, a bit position where an erroneous bit locates is determined by the parity checks and the erroneous bit is subject to an error correction. Therefore, it is advantageous that the high quality transmission can be achieved very economically and simply by utilizing the error monitoring bytes in the SOH used for SDH and adding few parity bits.

It should be noted that the present invention could be applied to TDM transmission. Assuming that a transmission data corresponding to one channel is to be transmitted. In this case, a transmitting-end optical transmission device or station comprises an encoder having k input and n outputs, for generating $(n-k)$ error correction bits for every transmission data having k bits, and, a wavelength-multiplexing unit connected to the encoding means, for converting the transmission data and the $(n-k)$ error correction bits to n optical signals having different wavelengths and for wavelength-multiplexing the n optical signals so as to be delivered to the optical transmission line. A receiving-end optical transmission device or station comprises a wavelength-demultiplexing unit for separating the wavelength-multiplexed optical signals from the optical transmission line into n optical signals, each corresponding to one of the different wavelengths and decoder connected to the

wavelength-multiplexing means, for correcting error bits of data having k bits contained in the n separated optical signals by using the $(n-k)$ error correction bits contained in the n separated optical signals.

5 Therefore, advantageously, a high quality transmission can be achieved by transmitting error correction bits without adversely affecting a transmission rate for primary signals at a transmitting-end and by performing error correction
10 at a receiving-end.

Furthermore, according to the present invention, when data conveyed on n channels are transmitted after time-division multiplexed, error correction bits may be transmitted by means of reserved
15 channels and a number of the channels used for error correcting coding may not be constrained. Therefore, the present invention provides an advantage that an error correction coding on data for particularly significant channels can be always implemented even
20 if the number of the reserved channels are much reduced.

The present application is based on Japanese priority application No.10-138556 filed on May 20, 1998, the entire contents of which are hereby incorporated by reference.

25

WHAT IS CLAIMED IS:

5

1. An optical transmission system comprising
a transmitting-end optical transmission device, a
receiving-end optical transmission device and an
optical transmission line connecting the
transmitting-end and receiving-end optical
transmission devices,

the transmitting-end optical transmission
device comprising:

encoding means having n outputs, for forming
k data by aligning phases of data on k channels with
each other and for generating $(n-k)$ error correction
bits for said k data and adding said $(n-k)$ error
correction bits to said k data; and

wavelength-multiplexing means connected to
the encoding means, for converting both said k data
and said $(n-k)$ error correction bits to n optical
signals having different wavelengths and for
wavelength-multiplexing said n optical signals so as
to be delivered to the optical transmission line, and

the receiving-end optical transmission
device comprising:

wavelength-demultiplexing means for
separating the wavelength-multiplexed optical signals
from the optical transmission line into n optical
signals, each corresponding to one of the different
wavelengths; and

decoding means connected to the
wavelength-multiplexing means, for generating k error
corrected data by correcting error bits using the $(n-k)$
error correction bits contained in said n separated
optical signals.

2. An optical transmission system comprising
5 a transmitting-end optical transmission device, a
receiving-end optical transmission device and an
optical transmission line connecting the
transmitting-end and receiving-end optical
transmission devices,

10 the transmitting-end optical transmission
device comprising:

parity generating means for forming k data
by adding an SOH (Section Over Head) including at least
one error monitoring byte to data on k channels and
15 aligning phases of said data with each other and for
generating a parity bit for said k data and adding said
parity bit to said k data; and

wavelength-multiplexing means connected to
the parity generating means, for converting said k data
20 and said parity bit to (k+1) optical signals having
different wavelengths and for wavelength-multiplexing
said (k+1) optical signals so as to be delivered to
the optical transmission line, and

the receiving-end optical transmission
25 device comprising:

wavelength-demultiplexing means for
separating the wavelength-multiplexed optical signals
from the optical transmission line into (k+1) optical
signals, each corresponding to one of the different
30 wavelengths; and

error correction means connected to the
wavelength-multiplexing means, for correcting error
bits based on one result of a parity check for said
separated (k+1) optical signals and the other result
35 of a parity check using said at least one error
monitoring byte.

3. An optical transmission system comprising
5 a transmitting-end optical transmission device, a
receiving-end optical transmission device and an
optical transmission line connecting the
transmitting-end and receiving-end optical
transmission devices,

10 the transmitting-end optical transmission
device comprising:

encoding means having k input and n outputs,
for generating $(n-k)$ error correction bits for every
transmission data having k bits; and

15 wavelength-multiplexing means connected to
the encoding means, for converting said transmission
data and said $(n-k)$ error correction bits to n optical
signals having different wavelengths and for
wavelength-multiplexing said n optical signals so as
20 to be delivered to the optical transmission line, and

the receiving-end optical transmission
device comprising:

wavelength-demultiplexing means for
separating the wavelength-multiplexed optical signals
25 from the optical transmission line into n optical
signals, each corresponding to one of the different
wavelengths; and

decoding means connected to the
wavelength-multiplexing means, for correcting error
30 bits of data having k bits contained in said n separated
optical signals by using said $(n-k)$ error correction
bits contained in said n separated optical signals.

35

4. An optical transmission system comprising

a transmitting-end optical transmission device, a receiving-end optical transmission device and an optical transmission line connecting the transmitting-end and receiving-end optical

5 transmission devices,

the transmitting-end optical transmission device comprising:

encoding means having k input and n output, for generating $(n-k)$ error correction bits for
10 transmission data on k channels and adding the $(n-k)$ error correction bits to the transmission data so as to form a sequence of n data;

multiplexing and frame generating means connected to the encoding means, for adding a frame
15 synchronization information to each data in the sequence of the n data and time-division-multiplexing the n data; and

electrical-optical converting means connected to the multiplexing and frame generating
20 means, for converting the time-division-multiplexed n data into n optical signals so as to deliver the n optical signals to the optical transmission line, and

the receiving-end optical transmission device comprising:

25 optical-electrical converting means for converting the n optical signals via the optical transmission line to electrical signals;

separating means connected to the optical-electrical converting means, for separating
30 the electrical signals into a sequence of n data by detecting the frame synchronization information; and

decoding means connected to the separating means, for performing error correction decoding for a sequence of k data from said separated sequence of
35 the n data using a sequence of $(n-k)$ data from said separated sequence of the n data.

5. An optical transmission device

5 comprising:

encoding means having k inputs, for forming n data by generating $(n-k)$ error correction bits for k data corresponding to k channels and adding the $(n-k)$ error correction bits to the k data;

10 phase alignment means for aligning phases of the n data received from the encoding means;

electrical-optical converting means for converting the n data aligned in phase by the phase alignment means to n optical signals having different
15 wavelengths; and

wavelength-multiplexing means for multiplexing the n optical signals having the different wavelengths received from the electrical-optical converting means so as to form
20 wavelength-multiplexed signals.

25 6. An optical transmission device comprising:

wavelength-demultiplexing means for separating wavelength-multiplexed optical signals having n wavelengths into n optical signals

30 corresponding to the n wavelengths;

optical-electrical converting means connected to the wavelength-demultiplexing means, for receiving and converting the separated n optical signals corresponding to the n wavelengths into n
35 electrical signals; and

decoding means for performing an error correction decoding for k data contained in the n

electrical signals converted by the optical-electrical converting means using $(n-k)$ error correction bits contained in said n electrical signals.

5

7. An optical transmission device

10 comprising:

frame generating and SOH inserting means for adding an SOH (Section Over Head) to data for each of k channels such that all the k data can be aligned in phase by means of a frame synchronization byte within each SOH;

15

encoding means having n outputs and connected to the frame generating and SOH inserting means, for receiving the k data with the SOH, generating $(n-k)$ error correction bits for the k data without taking the frame synchronization bytes into account, adding a frame synchronization byte to each of the $(n-k)$ error correction bits and forming n data, each of the n data including its frame synchronization byte, by combining the $(n-k)$ error correction bits and the k data corresponding to the k channels;

20

electrical-optical means for converting the n data from the encoding means into n optical signals having different wavelengths; and

wavelength-multiplexing means connected to the electrical-optical converting means, for multiplexing the n optical signals from the electrical-optical converting means so as to form wavelength-multiplexed signals.

30

35

8. An optical transmission device
comprising:

wavelength-demultiplexing means for
separating wavelength-multiplexed optical signals
5 having n wavelengths into n optical signals
corresponding to the n wavelengths;

optical-electrical converting means
connected to the wavelength-demultiplexing means, for
receiving and converting the separated n optical
10 signals corresponding to the n wavelengths into n
electrical signals;

frame top detecting means for detecting a top
of a frame for each of the n electrical signals
converted by the optical-electrical converting means;

15 memory means for storing the n electrical
signals converted by the optical-electrical
converting means and outputting the stored n
electrical signals such that the tops of the frames
detected by the frame top detecting means are aligned
20 with each other;

decoding means for performing an error
correction decoding for k data contained in the n
electrical signals converted by the optical-
electrical converting means using $(n-k)$ error
25 correction bits contained in said n electrical
signals; and

SOH (Section Over Head) terminating means
for receiving the k data from the decoding means and
terminating an SOH for said every k data.
30

9. An optical transmission device
35 comprising:

SOH inserting means for adding an SOH
(Section Over Head) including an error monitoring byte

at least one error monitoring byte attached to said
k electrical signals; and

error correction means for performing an
error correction at the bit position of the error bit
5 located by the parity detection means.

10 11. An optical transmission device
comprising:

encoding means having k inputs and n outputs,
for generating (n-k) error correction bits for every
k bits of transmission data;

15 phase alignment means for aligning both tops
of the transmission data having the k bits and the (n-k)
error correction bits in phase;

electrical-optical converting means for
converting the transmission data and the error
20 correction bits aligned in phase with one another by
the phase alignment means to optical signals having
different wavelengths;

wavelength-multiplexing means for receiving
from the electrical-optical means and multiplexing the
25 optical signals having the different wavelengths.

30 12. An optical transmission device
comprising:

wavelength-demultiplexing means for
separating wavelength-multiplexed optical signals
into n optical signals having different wavelengths;

35 optical-electrical converting means for
converting the n optical signals having the different
wavelengths to n electrical signals including k bits

representing transmission data;

decoding means receiving the n electrical signals from the optical-electrical converting means, for performing error correction decoding for every
5 said k bits using $(n-k)$ bits representing error correction bits.

10

13. An optical transmission device comprising:

encoding means having k input and n output, for generating $(n-k)$ error correction bits for
15 transmission data on k channels and adding the $(n-k)$ error correction bits to the transmission data so as to form a sequence of n data;

multiplexing and frame generating means connected to the encoding means, for adding a frame
20 synchronization information to each data in the sequence of the n data and time-division-multiplexing the n data; and

electrical-optical converting means connected to the multiplexing and frame generating
25 means, for converting the time-division-multiplexed n data into n optical signals so as to deliver the n optical signals to an optical transmission line.

30

14. An optical transmission device comprising:

optical-electrical converting means for
35 converting time-division-multiplexed signals to electrical signals;

separating means connected to the

optical-electrical converting means, for separating the electrical signals into a sequence of n data including k bits representing transmission data and $(n-k)$ bits representing error correction bits by
5 detecting a frame synchronization information; and
decoding means connected to the separating means, for performing error correction decoding for every said k bits using said $(n-k)$ error correction bits.

10

15 15. An optical transmission device having n channels comprising:

encoding means for generating error correction bits for m data corresponding to any m channels of k channels representing transmission data, k being less than n and a number of the error correction
20 bits being $(n-k)$;

identification signal inserting means connected to the encoding means, for inserting an identification signal into each of the m data and the $(n-k)$ error correction bits from the encoding means;

25 multiplexing means connected to the identification signal inserting means, for time-division-multiplexing $(k-m)$ data rather than said m data in the transmission data, and, said m data as well as said $(n-k)$ error correction bits; and

30 electrical-optical converting means for receiving from the multiplexing means and converting the time-division-multiplexed signals to optical signals.

35

16. An optical transmission device having n channels comprising:

optical-electrical converting means for converting time-division-multiplexed signals

5 including k data representing transmission data for k channels in the n channels and $(n-k)$ error correction bits to n electrical signals;

separating means for separating the n electrical signals receiving from the optical-
10 electrical converting means into a sequence of n data;

identification signal detecting means for detecting m data and the $(n-k)$ error correction bits in the sequence of the n data received from the separating means, each of the m data and the $(n-k)$ error
15 correction bits having an identification signal; and

decoding means receiving the k data and the $(n-k)$ error correction bits from the identification signal detecting means, for performing error correction decoding on the m data using the $(n-k)$ error
20 correction bits.

25 17. An optical transmission device having n channels comprising:

encoding means receiving m data corresponding to any m channels of k channels representing transmission data and $(k-m)$ fixed data,
30 for generating $(n-k)$ error correction, k being less than n ;

identification signal inserting means connected to the encoding means, for inserting an identification signal into each of the m data and the
35 $(n-k)$ error correction bits;

multiplexing means connected to the identification signal inserting means, for time-

division-multiplexing (k-m) data rather than said m data in the transmission data, and, said m data as well as said (n-k) error correction bits; and

electrical-optical converting means for
5 receiving from the multiplexing means and converting the time-division-multiplexed signals to optical signals.

10

18. An optical transmission device having n channels comprising:

optical-electrical converting means for
15 converting time-division-multiplexed signals including k data representing transmission data for k channels in the n channels and (n-k) error correction bits to n electrical signals;

separating means for separating the n
20 electrical signals receiving from the optical-electrical converting means into a sequence of n data;

identification signal detecting means for detecting m data and the (n-k) error correction bits in the sequence of the n data received from the
25 separating means, each of the m data and the (n-k) error correction bits having an identification signal; and

decoding means receiving the m data as well as the (n-k) error correction bits from the identification signal detecting means and (k-m) fixed
30 data, for performing error correction decoding on the m data using the (n-k) error correction bits.

35

19. An optical transmission device comprising:

5 each SOH:

10

15

- 20

25

25

30

35

decoding means for performing an error

correction decoding for k data contained in the n electrical signals converted by the optical-electrical converting means using (n-k) error correction bits contained in said n electrical

5 signals; and

SOH (Section Over Head) terminating means for receiving the k data from the decoding means and terminating an SOH for said every k data.

10

[illegible]

ABSTRACT OF THE DISCLOSURE

An optical transmission system and optical transmission devices in the optical transmission system that can achieve a high quality transmission using considerably simple arrangements are disclosed. At a transmitting-end optical transmission device, encoding means having n outputs, forms k data by aligning phases of data on k channels with each other and for generating $(n-k)$ error correction bits for said k data and adding said $(n-k)$ error correction bits to said k data, and wavelength-multiplexing means connected to the encoding means, converts both said k data and said $(n-k)$ error correction bits to n optical signals having different wavelengths and for wavelength-multiplexing said n optical signals so as to be delivered to the optical transmission line. At a receiving-end optical transmission device, wavelength-demultiplexing means separates the wavelength-multiplexed optical signals from the optical transmission line into n optical signals, each corresponding to one of the different wavelengths, and decoding means connected to the wavelength-multiplexing means, generates k error corrected data by correcting error bits using the $(n-k)$ error correction bits contained in said n separated optical signals.

FIG. 1 PRIOR ART

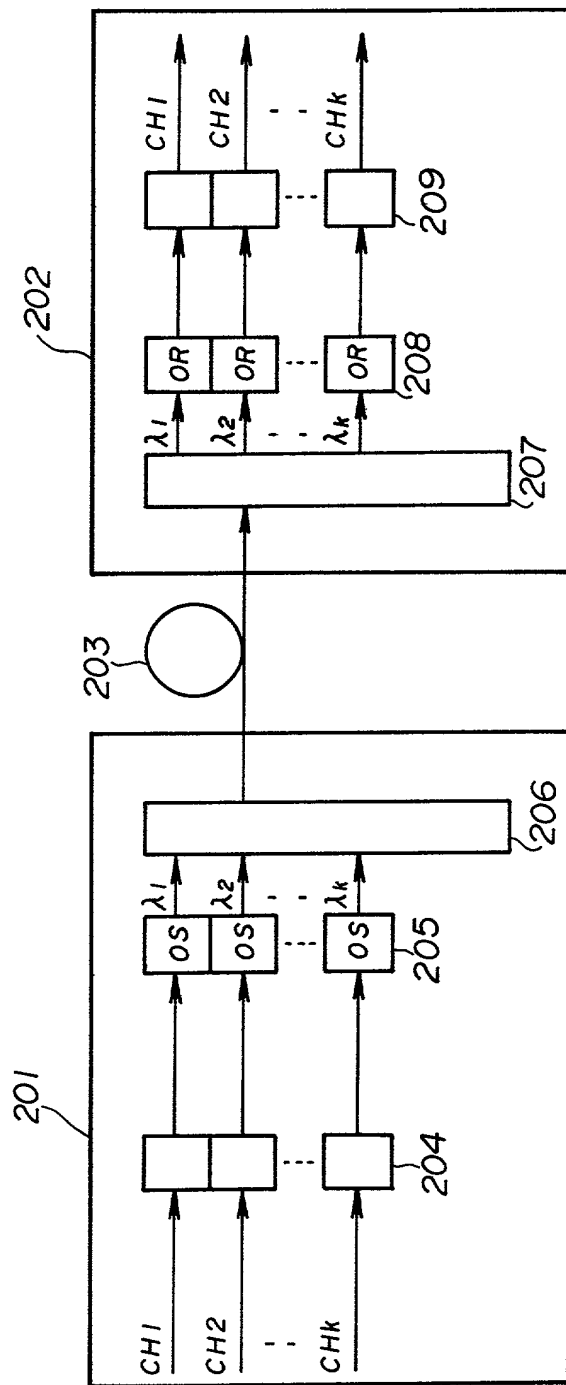


FIG. 2

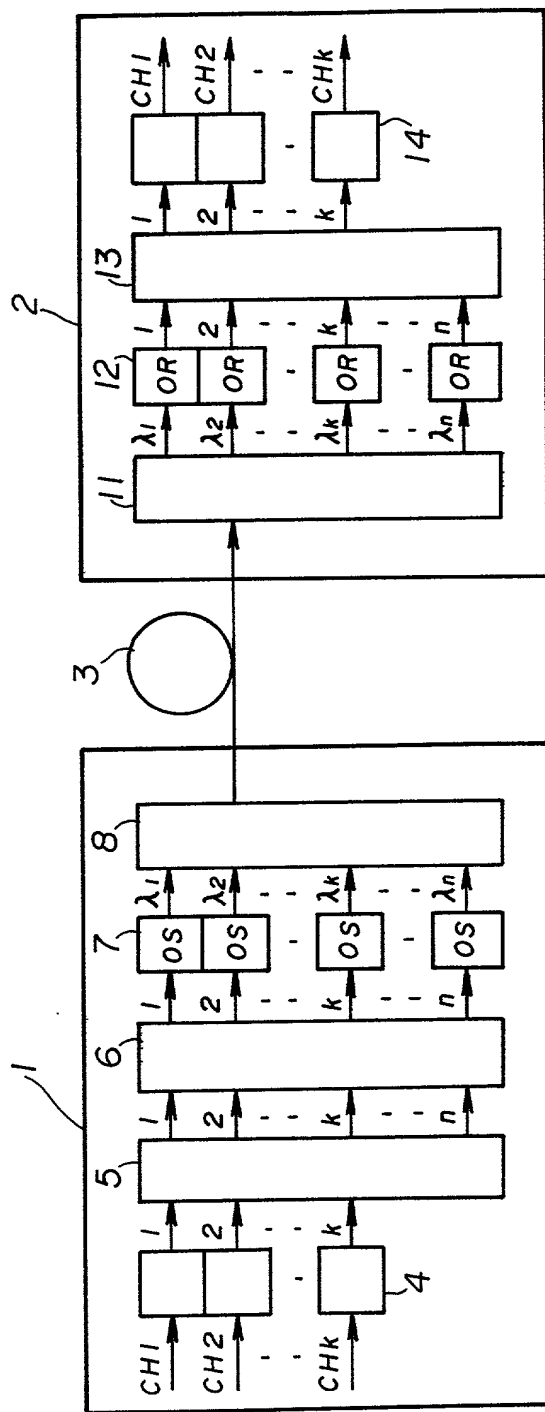


FIG. 3

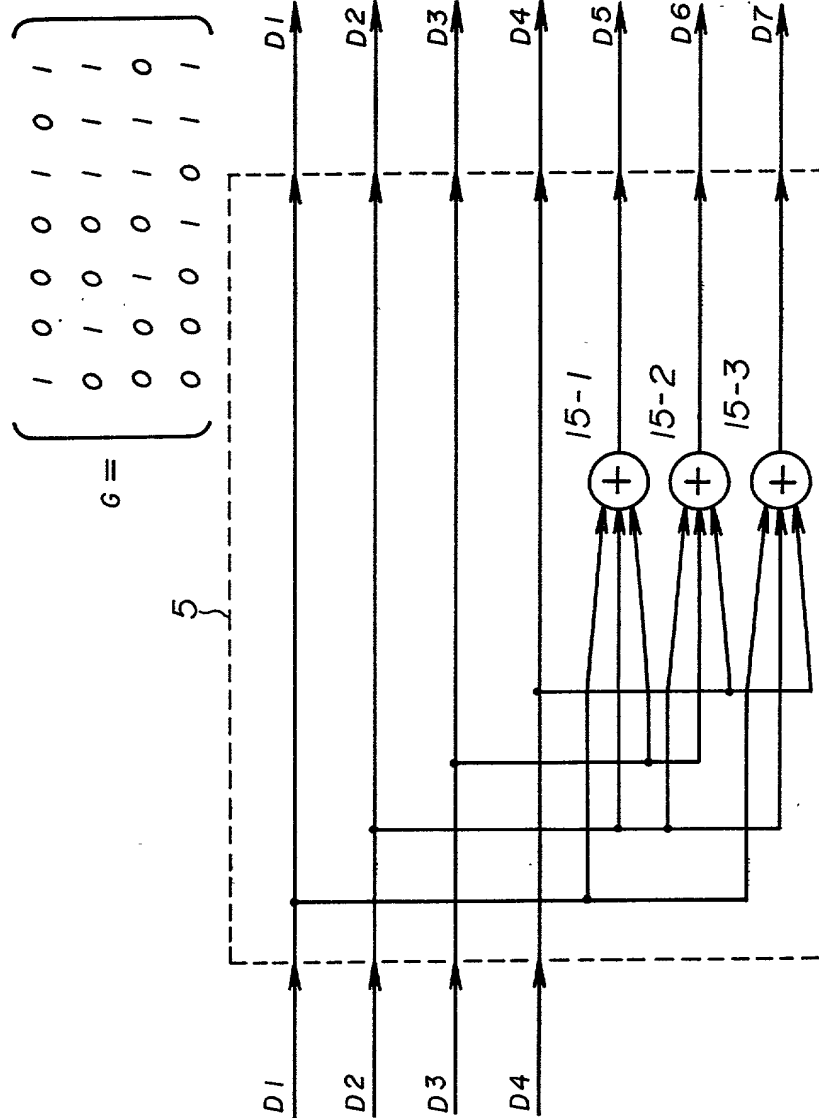


FIG. 4

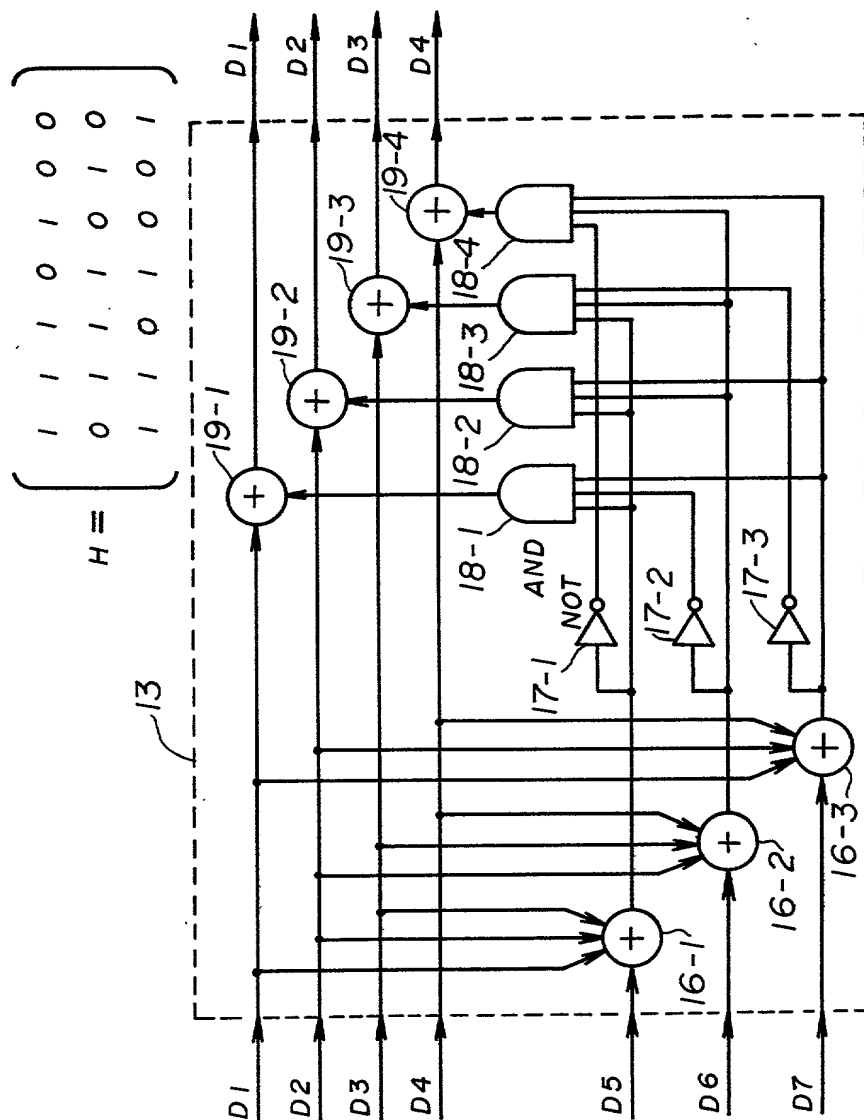


FIG. 5

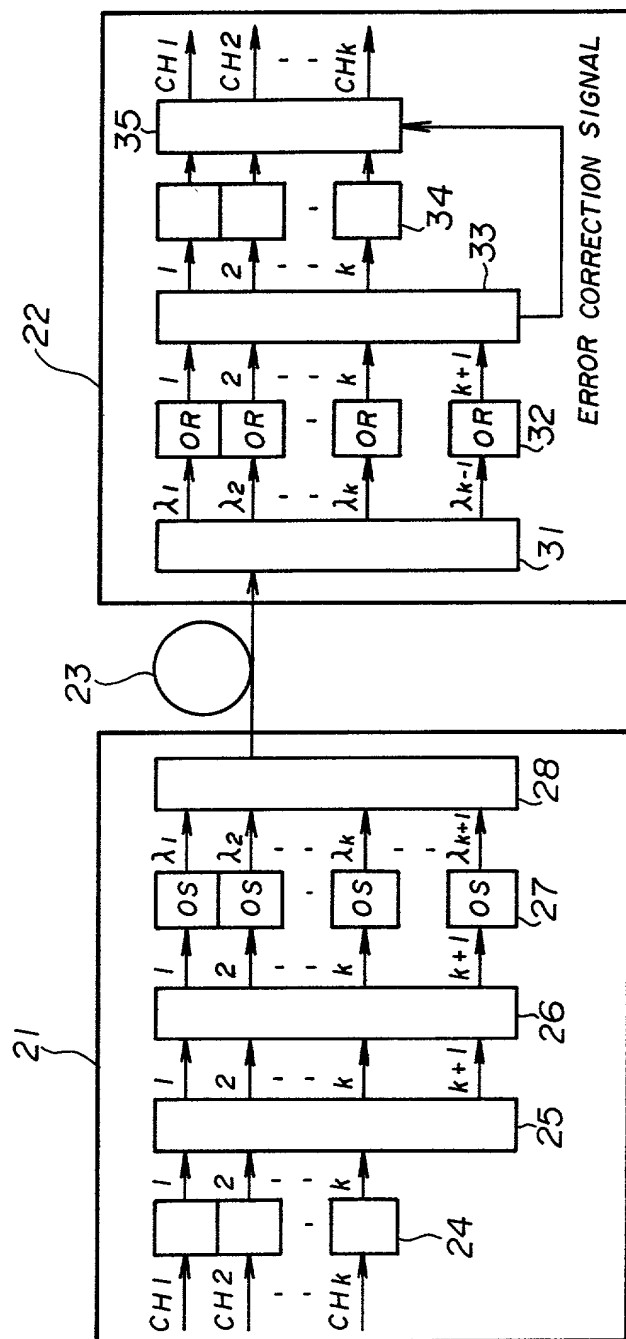


FIG. 6

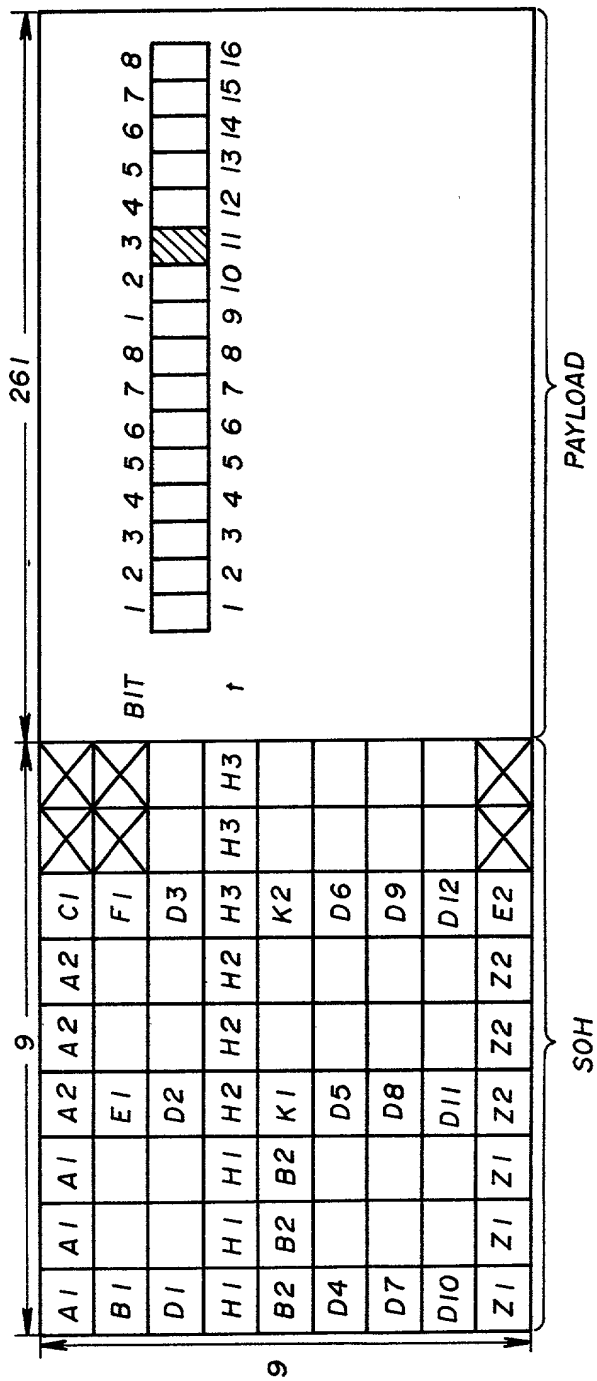


FIG. 7

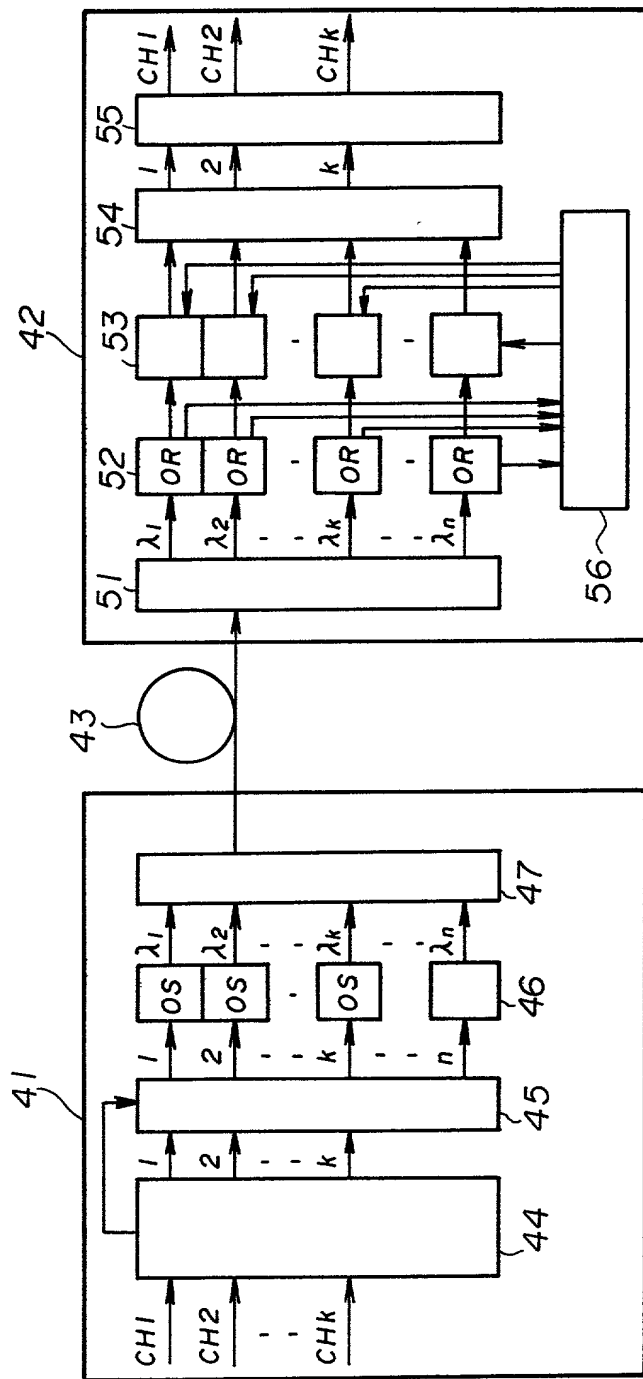


FIG. 8

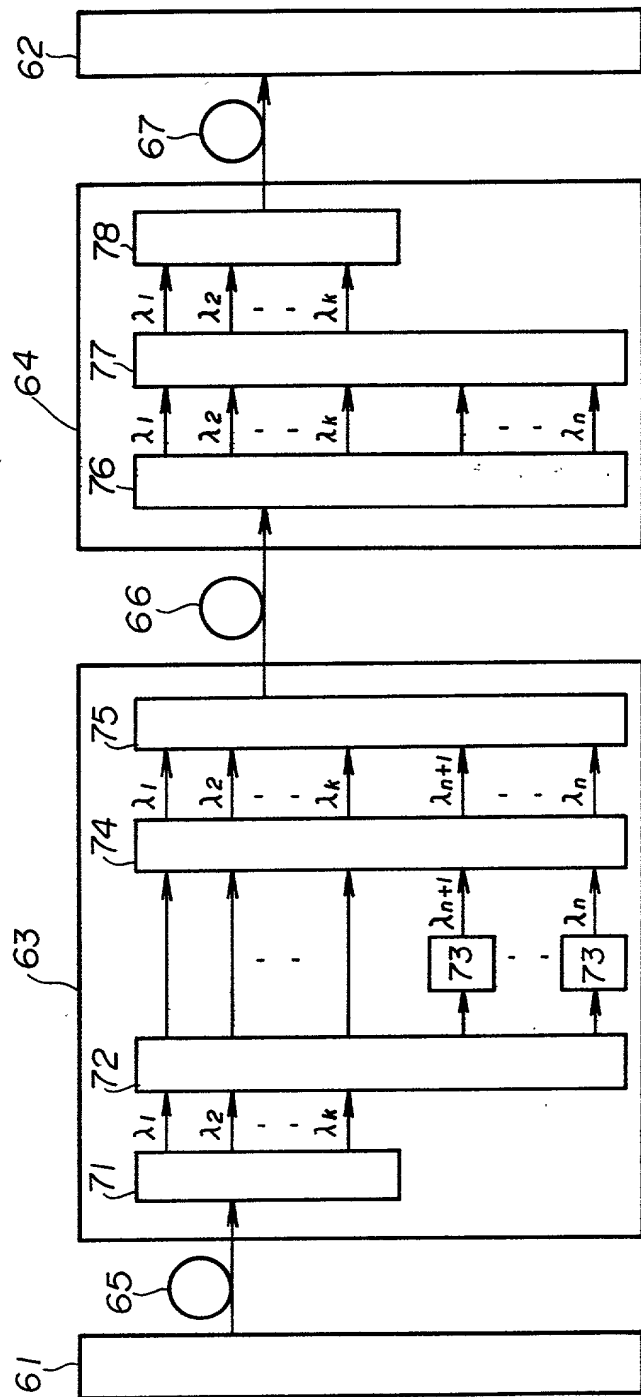


FIG. 9

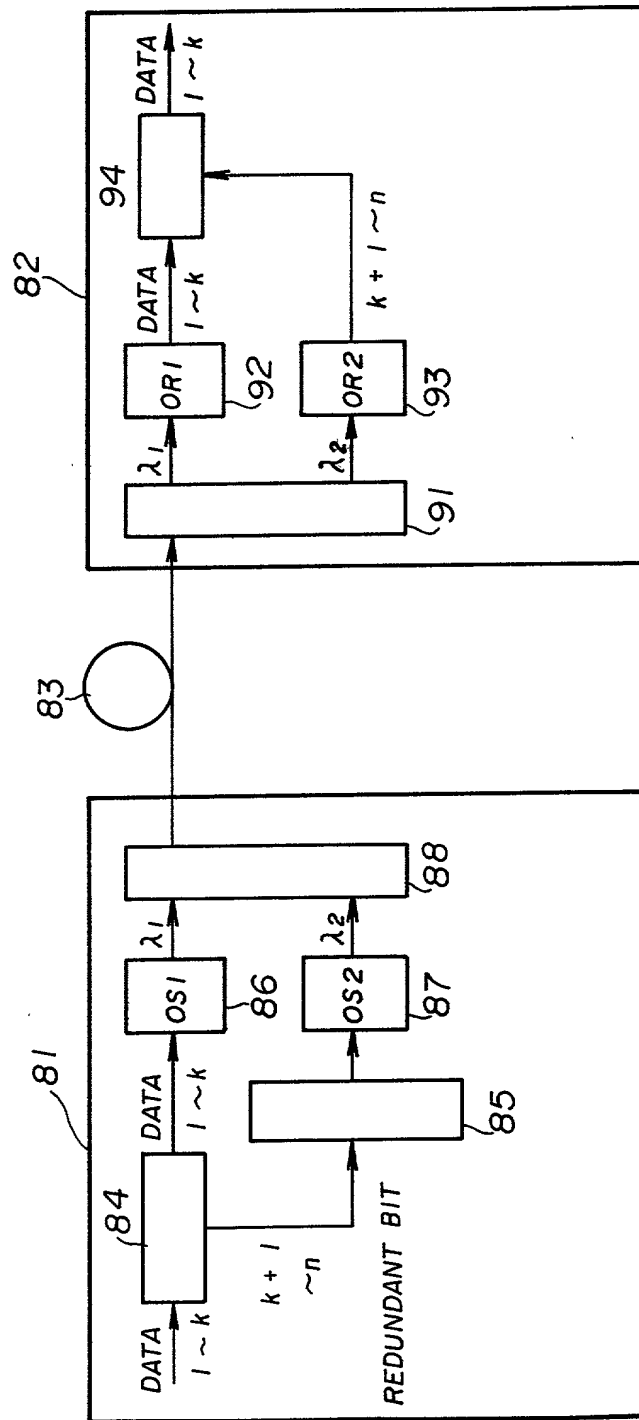


FIG. 10

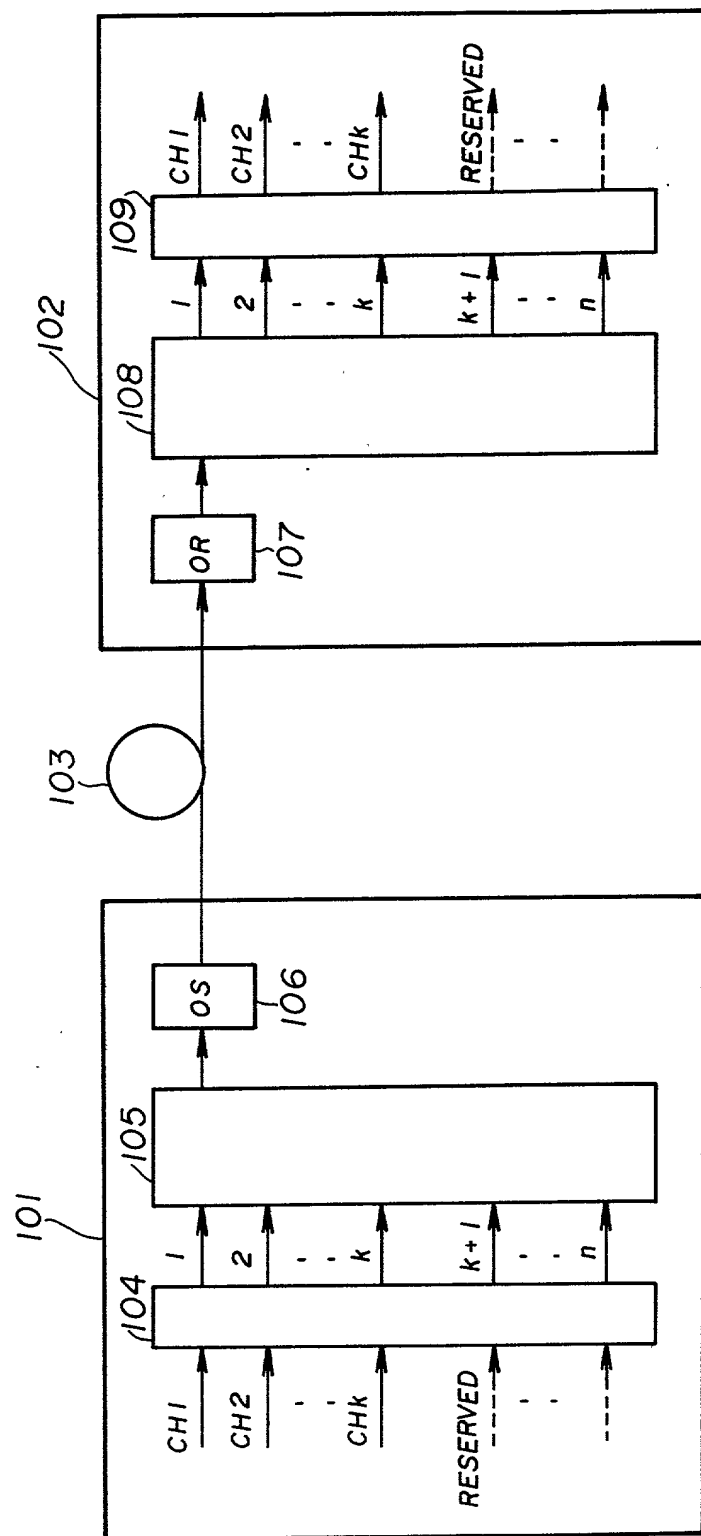


FIG. 11


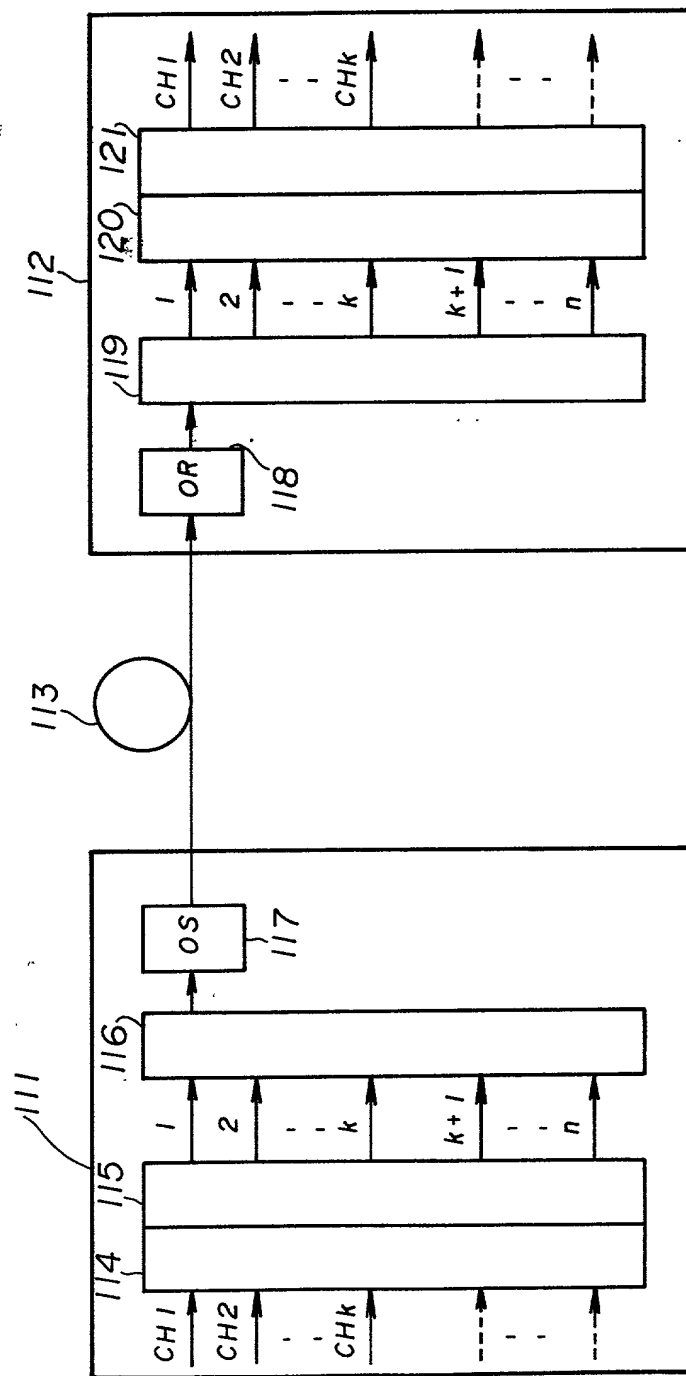


FIG. 13

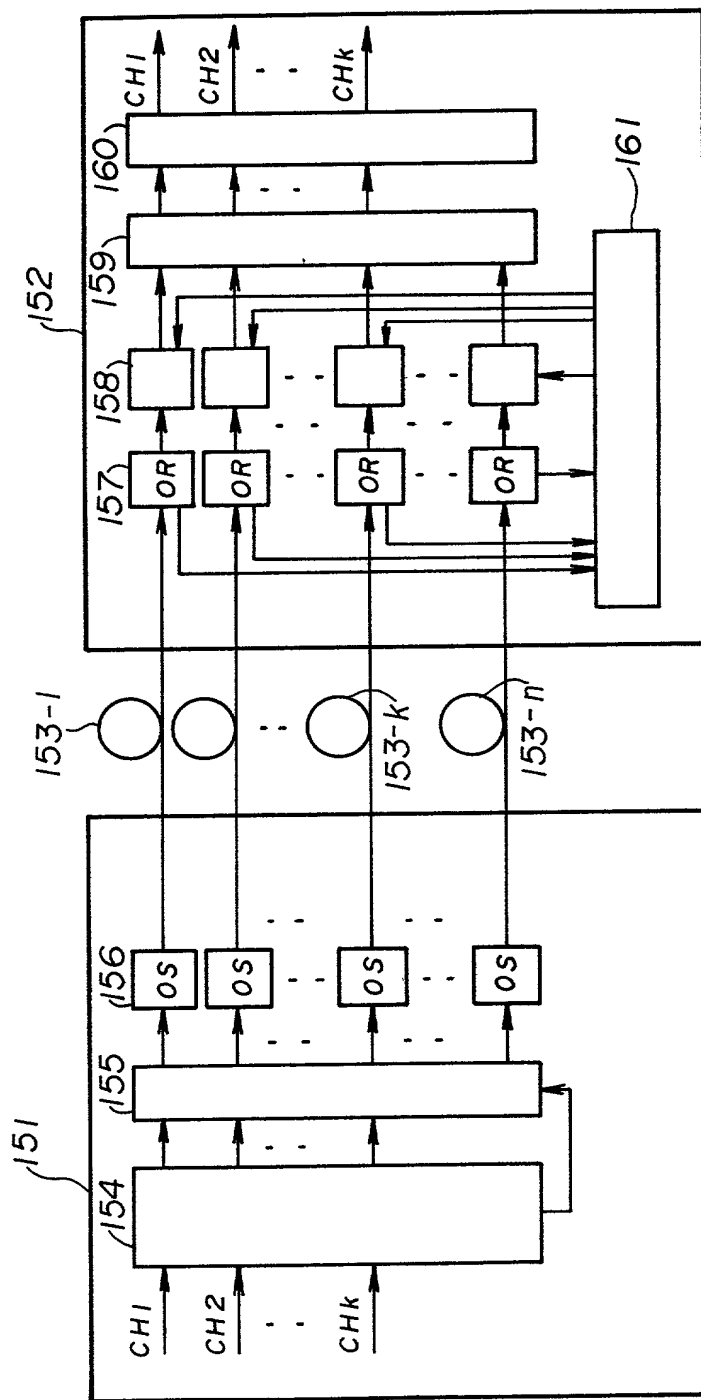

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

OPTICAL TRANSMISSION SYSTEM AND

OPTICAL TRANSMISSION DEVICE

上記発明の明細書（下記の欄でx印がついていない場合は、本番に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
（該当する場合） _____ に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

Pat. Appln. No. 10-138556

Japan

(Number)

(Country)

(番号)

(国名)

(Number)

(Country)

(番号)

(国名)

私は、第35編米国法典119条(a)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.)

(Filing Date)

(出願番号)

(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)

(Filing Date)

(出願番号)

(出願日)

(Application No.)

(Filing Date)

(出願番号)

(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行なえば、出願した、又は先に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

20/May/1998

(Day/Month/Year Filed)

(出願年月日)

(Day/Month/Year Filed)

(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)

(Filing Date)

(出願番号)

(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration

(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の
手続を米特許審判局に対して遂行する弁護士または代理人
として、下記の者を指名いたします。(弁護士、または代理
人氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint
the following attorney(s) and/or agent(s) to prosecute this
application and transact all business in the Patent and Trademark
Office connected therewith (list name and registration number)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers, 30,358;
William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D. Stein, 37,240; Paul
I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756; George N. Stevens, 36,938;
Michael C. Soldner, P-41,455 and William M. Schertler, 35,348 (agent)

書類送付先

Send Correspondence to:

STAAS & HALSEY
700 Eleventh Street, N.W.
Suite 500
Washington, D.C. 20001

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY
(202) 434-1500

唯一または第一発明者名	Full name of sole or first inventor Kazuhisa Murata	
発明者の署名	日付	Inventor's signature Kazuhisa Murata Date April 1, 1999
住所	Residence Kawasaki-shi, Kanagawa, Japan	
国籍	Citizenship Japan	
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa, 211-8588 Japan	
第二共同発明者	Full name of second joint inventor, if any	
第二共同発明者	日付	Second inventor's signature Date
住所	Residence	
国籍	Citizenship	
私書箱	Post Office Address	

(第三以降の共同発明者についても同様に記載し、署名をす
ること)

(Supply similar information and signature for third and subsequent
joint inventors.)